

AC102-M12A - MULTI-PURPOSE ACCELEROMETER, 100 MV/G, WITH 4 PIN M12 TOP CONNECTOR

AC102-M12A - monikäyttöinen kiihtyvyyssanturi, 4 pin liitin päällä, 100 mV/g

MSP_VIRTUEMA CTC
RT_MANUFACT
URER

MSP_VIRTUEMA AC102-M12A
RT_SKU:

Tyyppi: 1-akselinen
Teollisuus

Herkkyys: 100 mV/g

Taajuusalue: 0.5-15000 Hz

Mittausalue: ± 50 g

Sovellukset: Condition Monitoring

Saatavana vain yhdellä kokoonpanolla:



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd/




www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ

AC102-M12A

4 Pin Connector

Connector Pin	Polarity
A	(+) Signal/Power
B	(-) Common
C	Not Used
D	Not Used

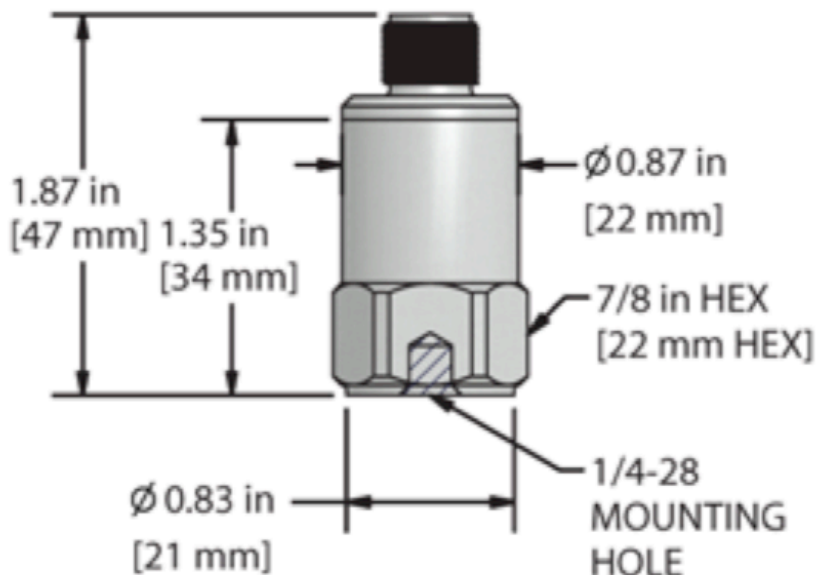

MSP_VIRTUEMART_TECHDETAILS

- Sensitivity: 100 mV/g
- Frequency Response (± 3 dB): 0.5-15000 Hz
- Dynamic Range: ± 50 g, peak
- Power Requirements Voltage Source: 18-30 VDC
- Temperature Range: -58 to 250°F (-50 to 121°C)
- Case Material: 316L Stainless Steel



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd-/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ

- Connector: 4 Pin M12
- Max Temp: 250°F
(121°C)

MSP_VIRTUEMART_PRODDOCS

1. [Esite](http://www.mip.fi/images/docs/fi/1_vs_ac102-m12a_ds.pdf) , (URL: http://www.mip.fi/images/docs/fi/1_vs_ac102-m12a_ds.pdf)

MSP_VIRTUEMART_PRODUCT_IMAGE_TITLE



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd-/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd-/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ