

AC102 - MULTI-PURPOSE ACCELEROMETER, TOP EXIT CONNECTOR / CABLE, 100 MV/G

AC102 - monikäyttöinen kiihtyvyysanturi, liitin päällä, 100 mV/g

MSP_VIRTUEMA CTC
RT_MANUFACTURER

MSP_VIRTUEMA AC102
RT_SKU:

Tyyppi: 1-akselinen
Teollisuus

Herkkyys: 100 mV/g

Taajuusalue: 0.5-15000 Hz

Mittausalue: ± 50 g


Sovellukset: Condition Monitoring

Saatavissa 3 eri kokoonpanolla:

- 2 pin liittimellä AC102 - 1A
- Integroidulla kaapelilla AC102 - 2C
- Integroidulla suojatulla kaapelilla AC102 - 3C
- Integroidulla heavy duty suojatulla kaapelilla AC102 - 6C

AC102-1A

2 Pin Connector

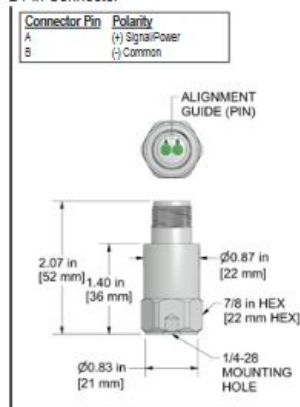


AC102-2C

Integral Cable




AC102-3C

Armored Integral Cable

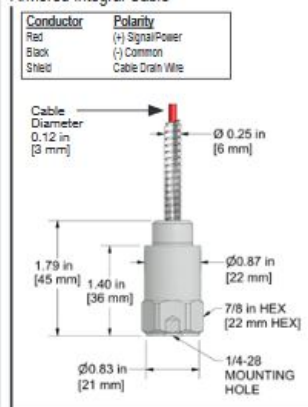

AC102-6C

Heavy Duty Armored Integral Cable

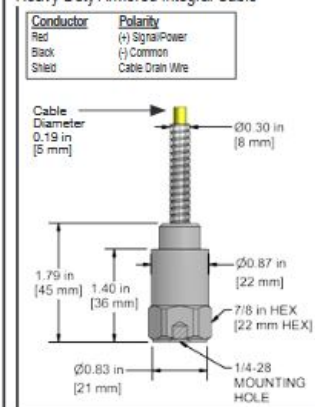

MSP_VIRTUEMART_TECHDETAILS

- Sensitivity: 100 mV/g
- Frequency Response (± 3 dB): 0.5-15000 Hz



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAqDQ

- Dynamic Range: ± 50 g, peak
- Power Requirements Voltage Source: 18-30 VDC
- Temperature Range: -58 to 250°F
(-50 to 121°C)
- Case Material: 316L Stainless Steel
- Connector: 2 Pin MIL-C-5015
- Max Temp: 250°F
(121°C)

MSP_VIRTUEMART_PRODDOCS

1. [Esite](http://www.mip.fi/images/docs/fi/1_vs_ac102_ds.pdf) , (URL: http://www.mip.fi/images/docs/fi/1_vs_ac102_ds.pdf)

MSP_VIRTUEMART_PRODUCT_IMAGE_TITLE



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd-/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ