

AC104-M12A - MULTI-PURPOSE ACCELEROMETER, 100 MV/G, WITH 4 PIN M12 SIDE CONNECTOR

AC104-M12A - monikäyttöinen kiihtyvyyssanturi, 4 pin liitin sivulla, 100 mV/g

MSP_VIRTUEMA	CTC
RT_MANUFACTURER	
MSP_VIRTUEMA	AC104-M12A
RT_SKU:	
Tyyppi:	1-akselinen Teollisuus
Herkkyys:	100 mV/g
Taajuusalue:	0.5-10000 Hz
Mittausalue:	± 50 g
Sovellukset:	Condition Monitoring

Saatavana vain yhdellä kokoonpanolla.



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd/




www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ

AC104-M12A

4 Pin Connector

Connector Pin	Polarity
1	(+) Signal/Power
2	(-) Common
3	Not Used
4	Not Used

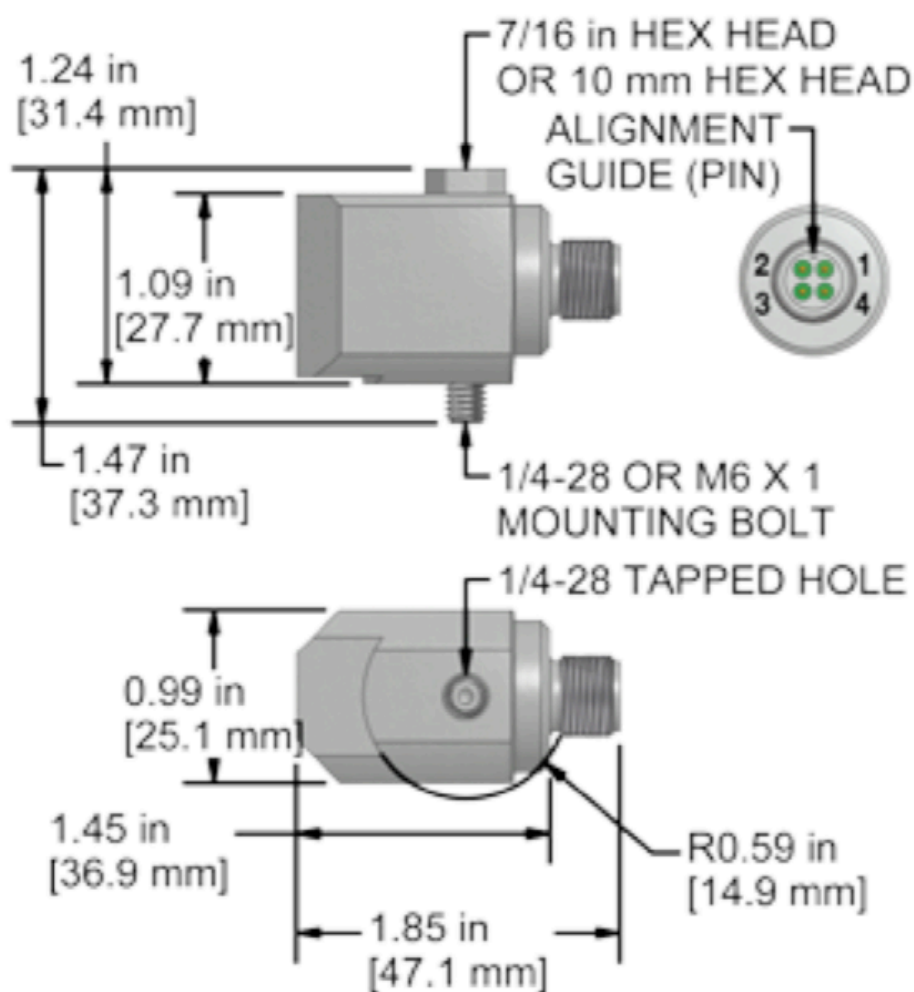

MSP_VIRTUEMART_TECHDETAILS

- Sensitivity: 100 mV/g
- Frequency Response (± 3 dB): 0.5-10000 Hz
- Dynamic Range: ± 50 g, peak
- Power Requirements Voltage Source: 18-30 VDC
- Temperature Range: -58 to 250°F
(-50 to 121°C)



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ

- Case Material: 316L Stainless Steel
- Connector: 4 Pin M12
- Max Temp: 250°F
(121°C)

MSP_VIRTUEMART_PRODDOCS

1. [Esite](http://www.mip.fi/images/docs/fi/1_vs_ac104-m12a_ds.pdf) , (URL: http://www.mip.fi/images/docs/fi/1_vs_ac104-m12a_ds.pdf)

MSP_VIRTUEMART_PRODUCT_IMAGE_TITLE



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd-/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd-/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ