

AC115-M12D - LOW COST TRIAXIAL ACCELEROMETER, CONNECTOR / CABLE, 100 MV/G, 4 PIN M12 CONNECTOR

AC115-M12D - Edullinen kolmiakselinen kiihtyvyyssanturi, 100 mV/g, 4 pin M12

MSP_VIRTUEMA CTC
RT_MANUFACTURER

MSP_VIRTUEMA AC115-M12D
RT_SKU:

Tyyppi: 3-akselinen
Teollisuus

Herkkyys: 100 mV/g

Taajuusalue: 1-6500 Hz

Mittausalue: ± 50 g

Sovellukset: Condition Monitoring

Saatavissa vain 1 kokoonpanolla:

- 4 pin liittimellä
- M12 kiinnitysruuvi




www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ

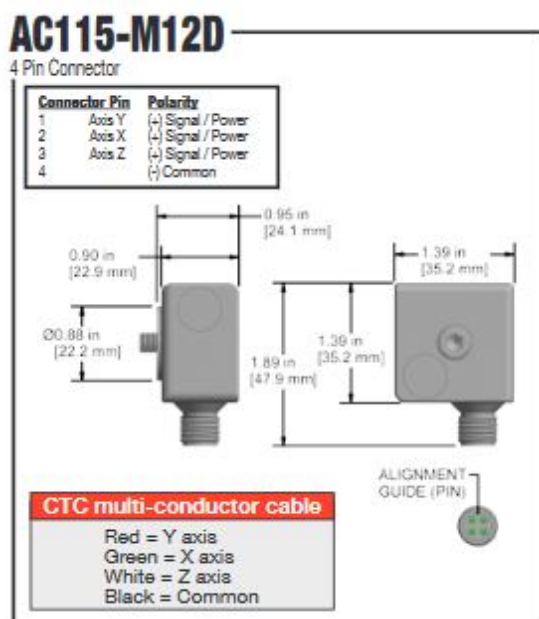

MSP_VIRTUEMART_TechDETAILS

- Sensitivity: 100 mV/g
- Frequency Response (± 3 dB): 1-6500 Hz
- Dynamic Range: ± 50 g, peak
- Power Requirements Voltage Source: 18-30 VDC
- Temperature Range: -58 to 250°F (-50 to 121°C)
- Case Material: 316L Stainless Steel
- Connector: 4 Pin M12 Connector
- Max Temp: 250°F (121°C)

MSP_VIRTUEMART_PRODDOCS

1. [Esite](http://www.mip.fi/images/docs/fi/1_vs_ac115-m12d_ds.pdf) , (URL: http://www.mip.fi/images/docs/fi/1_vs_ac115-m12d_ds.pdf)

MSP_VIRTUEMART_PRODUCT_IMAGE_TITLE



www.facebook.com/mipelectronics



[www.linkedin.com/company/mip-electronics-ltd-/](https://www.linkedin.com/company/mip-electronics-ltd/)



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd-/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ