

AC119 - BIAXIAL ACCELEROMETER, 100 MV/G, WITH X AND Z AXIS

AC119 - Kaksiakselinen kiihtyvyyssanturi, 100 mV/g, X- ja Z-akseli

MSP_VIRTUEMA CTC
RT_MANUFACTURER

MSP_VIRTUEMA AC119
RT_SKU:

Tyyppi: 1-akselinen
Teollisuus

Herkkyys: 100 mV/g

Taajuusalue: 1-6500 Hz

Mittausalue: ± 50 g

Sovellukset: Condition Monitoring


Saatavilla 3 eri kokoonpanolla:

- 3 pin liittimellä AC119 - 1D
- Integroidulla kaapelilla AC119 - 2D
- Integroidulla heavy-duty suojatulla kaapelilla AC119 - 3D

AC119-1D

3 Pin Connector

Connector	Pin Polarity
A	Axis X (+) Signal / Power
B	Axis Z (+) Signal / Power
C	(-) Common/Gnd

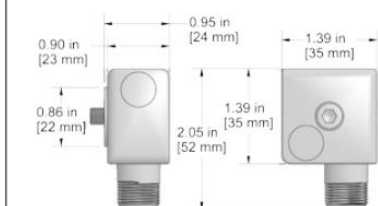


CTC multi-conductor cable
Green = X axis
White = Z axis
Black = Common



AC119-2D

Integral Cable


Conductor	Polarity
Green	Axis X (+) Signal / Power
White	Axis Z (+) Signal / Power
Black	(-) Common/Gnd

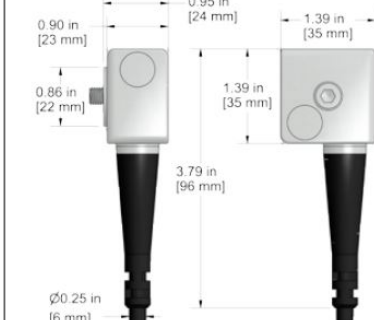

AC119-3D

Armored Integral Cable

Conductor	Polarity
Green	Axis X (+) Signal / Power
White	Axis Z (+) Signal / Power
Black	(-) Common/Gnd

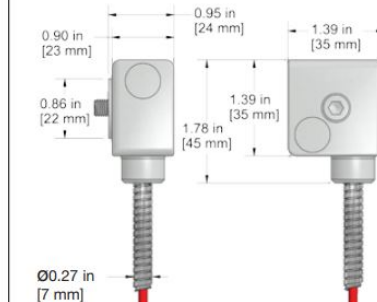

MSP_VIRTUEMART_TECHDETAILS

- Sensitivity: 100 mV/g
- Frequency Response (± 3 dB): 1-6500 Hz



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ

- Dynamic Range: ± 50 g, peak
- Power Requirements Voltage Source: 18-30 VDC
- Temperature Range: -58 to 250°F
(-50 to 121°C)
- Case Material: 316L Stainless Steel
- Connector: 3 Pin MIL
- Max Temp: 250°F
(121°C)

MSP_VIRTUEMART_PRODDOCS

1. [Esite](http://www.mip.fi/images/docs/fi/1_vs_ac119_ds.pdf) , (URL: http://www.mip.fi/images/docs/fi/1_vs_ac119_ds.pdf)

MSP_VIRTUEMART_PRODUCT_IMAGE_TITLE



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd-/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ