

AC131 - HIGH G ACCELEROMETER, TOP EXIT CONNECTOR / CABLE 10 MV/G

AC131 - High g kiihtyvyyssanturi, liitin/kaapeli päällä, 10 mV/g --> +- 500 g

MSP_VIRTUEMA CTC
RT_MANUFACTURER

MSP_VIRTUEMA AC131
RT_SKU:

Tyyppi: 1-akselinen
Teollisuus

Herkkyys: 10 mV/g

Taajuusalue: 1-15000 Hz

Mittausalue: ± 500 g

Sovellukset: Condition Monitoring

Saatavilla 4 eri kokoonpanolla:

- 2 pin liittimellä AC131 - 1A
- Integroidulla kaapelilla AC131 - 2C
- Integroidulla suojatulla kaapelilla AC131 - 3C
- Integroidulla heavy-duty suojatulla kaapelilla AC131 - 6C


AC131-1A

2 Pin Connector




AC131-2C

Integral Cable

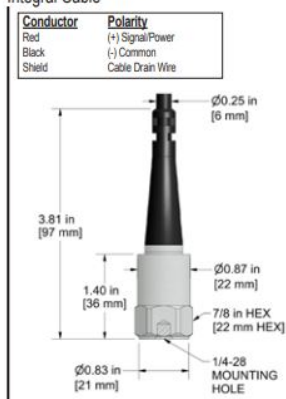


AC131-3C

Armored Integral Cable

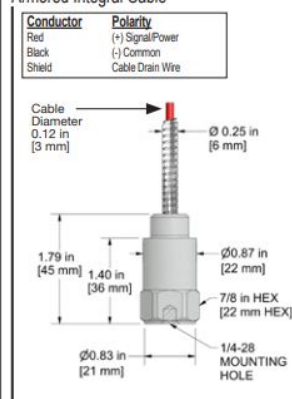

AC131-6C

Heavy Duty Armored Integral Cable

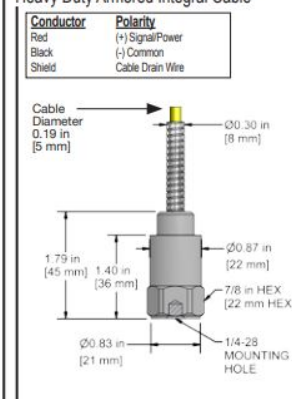

MSP_VIRTUEMART_TECHDETAILS

- Sensitivity: 10 mV/g
- Frequency Response (± 3 dB): 1-15000 Hz



www.facebook.com/mipelectronics



[www.linkedin.com/company/mip-electronics-ltd-/](https://www.linkedin.com/company/mip-electronics-ltd/)



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ

- Dynamic Range: ± 500 g, peak
- Power Requirements Voltage Source: 18-30 VDC
- Temperature Range: -58 to 250°F
(-50 to 121°C)
- Case Material: 316L Stainless Steel
- Connector: 2 Pin MIL-C-5015
- Max Temp: 250°F (121°C)

MSP_VIRTUEMART_PRODDOCS

1. [Esite](http://www.mip.fi/images/docs/fi/1_vs_ac131_ds.pdf) , (URL: http://www.mip.fi/images/docs/fi/1_vs_ac131_ds.pdf)

MSP_VIRTUEMART_PRODUCT_IMAGE_TITLE



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd-/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ