

AC146 - SMALL SIDE EXIT SENSOR WITH BUILT-IN INTEGRAL STUD, 100MV/G, +/- 10% SENSITIVITY

AC146 - Pienikokoinen, sivuliitännäinen, integroitu kierretappi, 100mV/g, +/- 10% herkkyys

MSP_VIRTUEMA CTC
RT_MANUFACT
URER

MSP_VIRTUEMA AC146
RT_SKU:

Tyyppi: 1-akselinen
Teollisuus

Herkkyys: 100 mV/g

Taajuusalue: 0.6-15000 Hz

Mittausalue: ± 80 g

Sovellukset: Condition Monitoring

Saatavissa 2 kokoonpanolla:

- 2 pin liittimellä AC146-1D
- Integroidulla kaapelilla AC146-2D



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd/

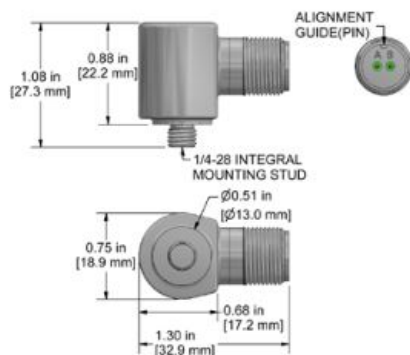


www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ

AC146-1D

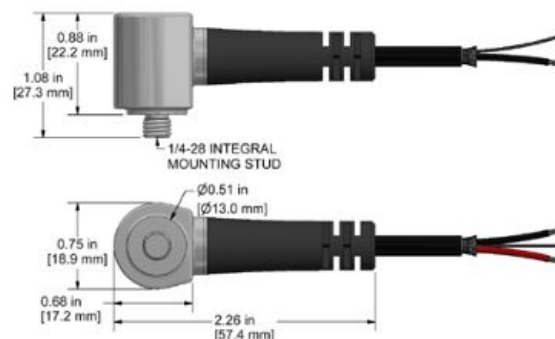
2 Pin Connector

Connector Pin	Polarity
A	(+) Signal/Power
B	(-) Common

**AC146-2D**

Integral Cable

Conductor	Polarity
Red	(+) Signal/Power
Black	(-) Common
Shield	Cable Drain Wire

**MSP_VIRTUEMART_TECHDETAILS**

- Sensitivity: 100 mV/g
- Frequency Response (± 3 dB): 0.6-15000 Hz
- Dynamic Range: ± 80 g, peak
- Power Requirements Voltage Source: 18-30 VDC
- Temperature Range: -58 to 250°F (-50 to 121°C)
- Case Material: 316L Stainless Steel
- Connector: 2 Pin MIL-C-5015
- Max Temp: 250°F (121°C)

MSP_VIRTUEMART_PRODDOCS

1. [Esite](http://www.mip.fi/images/docs/fi/1_vs_ac146_ds.pdf), (URL: http://www.mip.fi/images/docs/fi/1_vs_ac146_ds.pdf)

MSP_VIRTUEMART_PRODUCT_IMAGE_TITLE
www.facebook.com/mipelectronics

[www.linkedin.com/company/mip-electronics-ltd-/](https://www.linkedin.com/company/mip-electronics-ltd/)

www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd-/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ