

AC184 - MULTI-PURPOSE ACCELEROMETER, M8 CAPTIVE BOLT, SIDE EXIT CONNECTOR / CABLE, 100 MV/G

AC184 - Monikäyttöinen kiihtyvyyssanturi, M8 kiinnityspultilla, liitin/kaapeli sivulla, 100 mV/g

MSP_VIRTUEMA	CTC
RT_MANUFACTURER	
MSP_VIRTUEMA	AC184
RT_SKU:	
Tyyppi:	1-akselinen Teollisuus
Herkkyys:	100 mV/g
Taajuusalue:	0.5-10000 Hz
Mittausalue:	± 50 g
Sovellukset:	Condition Monitoring

Saatavissa 4 eri kokoonpanolla:

- 2 pin liittimellä AC184 - 1A
- Integroidulla kaapelilla AC184 - 2C
- Integroidulla suojatulla kaapelilla AC184 - 3C
- Integroidulla heavy duty suojatulla kaapelilla AC184 - 6C



www.facebook.com/mipelectronics



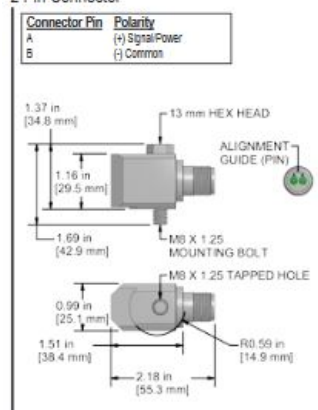
www.linkedin.com/company/mip-electronics-ltd/



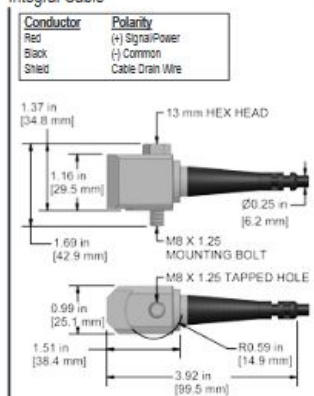
www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ

AC184-1A

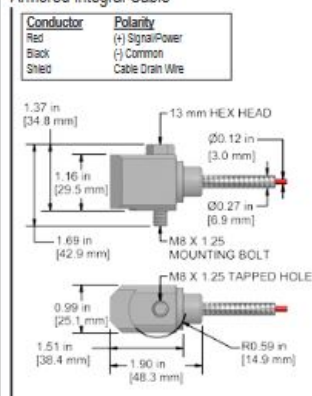
2 Pin Connector

**AC184-2C**

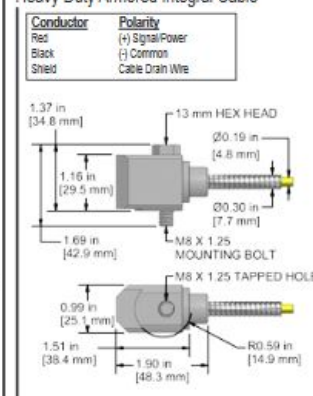
Integral Cable

**AC184-3C**

Armored Integral Cable

**AC184-6C**

Heavy Duty Armored Integral Cable

**MSP_VIRTUEMART_TECHDETAILS**

- Sensitivity: 100 mV/g
- Frequency Response ($\pm 3\text{dB}$): 0.5-10000 Hz
- Dynamic Range: ± 50 g, peak
- Power Requirements Voltage Source: 18-30 VDC
- Temperature Range: -58 to 250°F (-50 to 121°C)
- Case Material: 316L Stainless Steel
- Connector: 2 Pin MIL-C-5015
- Max Temp: 250°F (121°C)

MSP_VIRTUEMART_PRODDOCS

1. [Esite](http://www.mip.fi/images/docs/fi/1_vs_ac184_ds.pdf), (URL: http://www.mip.fi/images/docs/fi/1_vs_ac184_ds.pdf)

MSP_VIRTUEMART_PRODUCT_IMAGE_TITLE
www.facebook.com/mipelectronics

www.linkedin.com/company/mip-electronics-ltd/

www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd-/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ