

AC188 - HIGH TEMPERATURE ACCELEROMETER, M8 CAPTIVE BOLT, SIDE EXIT CONNECTOR / CABLE, 100 MV/G

AC188 - Kiihtyvyysanturi korkeisiin lämpötiloihin, M8 kiinnitys, liitin/kaapeli
sivulla, 100 mV/g

MSP_VIRTUEMA CTC
RT_MANUFACT
URER

MSP_VIRTUEMA AC188
RT_SKU:

Tyyppi: 1-akselinen
Teollisuus
Korkea lämpötila 162 C

Herkkyys: 100 mV/g

Taajuusalue: 1-8000 Hz

Mittausalue: ± 50 g

Sovellukset: Condition Monitoring

Saatavissa kolmella eri kokoonpanolla:

- 2 pin liittimellä AC188 - 1A
- Integroidulla suojatulla kaapelilla AC188 - 5C
- Integroidulla heavy duty suojatulla kaapelilla AC188 - 6C




www.facebook.com/mipelectronics



[www.linkedin.com/company/mip-electronics-ltd-/](https://www.linkedin.com/company/mip-electronics-ltd/)



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ

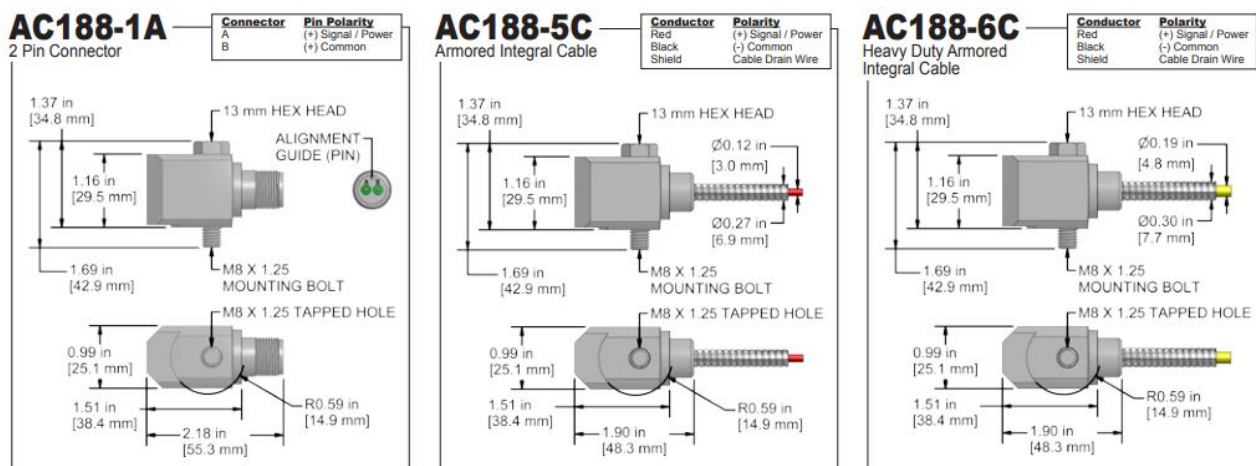

MSP_VIRTUEMART_TECHDETAILS

- Sensitivity: 100 mV/g
- Frequency Response (± 3 dB): 1-8000 Hz
- Dynamic Range: ± 50 g, peak
- Power Requirements Voltage Source: 18-30 VDC
- Temperature Range: -58 to 302° F (-50 to 150°C)
- Case Material: 316L Stainless Steel
- Connector: 2 Pin MIL-C-5015
- Max Temp: 302° F (150°C)

MSP_VIRTUEMART_PRODDOCS

1. [Esite](http://www.mip.fi/images/docs/fi/1_vs_ac188_ds.pdf), (URL: http://www.mip.fi/images/docs/fi/1_vs_ac188_ds.pdf)

MSP_VIRTUEMART_PRODUCT_IMAGE_TITLE



www.facebook.com/mipelectronics



[www.linkedin.com/company/mip-electronics-ltd-/](https://www.linkedin.com/company/mip-electronics-ltd/)



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd-/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ