

AC194 - COMPACT, MULTI-PURPOSE ACCELEROMETER, SIDE EXIT CONNECTOR / CABLE, 100 MV/G

AC194 - Kompakti, monikäyttöinen kiihtyvyysanturi, liitin/kaapeli sivulla, 100 mV/g

MSP_VIRTUEMA RT_MANUFACT URER	CTC
MSP_VIRTUEMA RT_SKU:	AC194
Tyyppi:	1-akselinen Teollisuus
Herkkyys:	100 mV/g
Taajuusalue:	0.5-10000 Hz
Mittausalue:	± 80 g
Sovellukset:	Condition Monitoring

Saatavissa 4 eri kokoonpanolla:

- 2 pin liittimellä AC194 - 1D
- Integroidulla kaapelilla AC194 - 2D
- Integroidulla suojatulla kaapelilla AC194 - 3D
- Integroidulla heavy duty suojatulla kaapelilla AC194 - 6D



www.facebook.com/mipelectronics



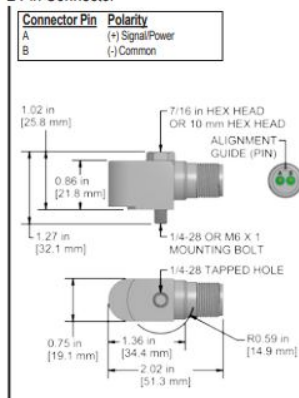
[www.linkedin.com/company/mip-electronics-ltd-/](https://www.linkedin.com/company/mip-electronics-ltd/)



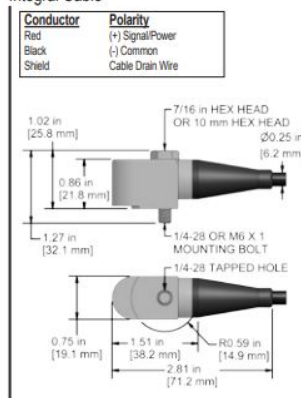
www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ

AC194-1D

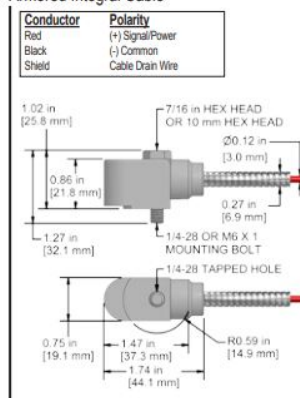
2 Pin Connector

**AC194-2D**

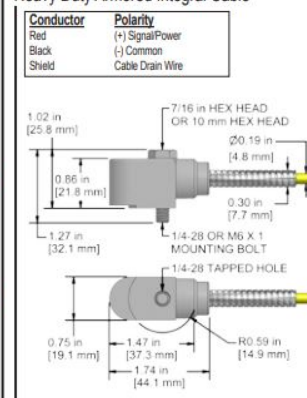
Integral Cable

**AC194-3D**

Armored Integral Cable

**AC194-6D**

Heavy Duty Armored Integral Cable

**MSP_VIRTUEMART_TechDETAILS**

- Sensitivity: 100 mV/g
- Frequency Response ($\pm 3\text{dB}$): 0.5-10000 Hz
- Dynamic Range: ± 80 g, peak
- Power Requirements Voltage Source: 18-30 VDC
- Temperature Range: -58 to 250°F (-50 to 121°C)
- Case Material: 316L Stainless Steel
- Connector: 2 Pin MIL-C-5015
- Max Temp: 250°F (121°C)

MSP_VIRTUEMART_PRODDOCS

1. [Esite](http://www.mip.fi/images/docs/fi/1_vs_ac194_ds.pdf) , (URL: http://www.mip.fi/images/docs/fi/1_vs_ac194_ds.pdf)

MSP_VIRTUEMART_PRODUCT_IMAGE_TITLE
www.facebook.com/mipelectronics

[www.linkedin.com/company/mip-electronics-ltd-/](https://www.linkedin.com/company/mip-electronics-ltd/)

www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAqDQ



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd-/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ