

AC213 - LOW FREQUENCY ACCELEROMETER, SIDE EXIT CONNECTOR, 250 MV/G

AC213 - Matalataajuinen kiihtyvyysanturi, liitin/kaapeli sivulla, 250 mV/g

MSP_VIRTUEMA CTC
RT_MANUFACTURER

MSP_VIRTUEMA AC213
RT_SKU:

Tyyppi: 1-akselinen
Teollisuus

Herkkyys: 250 mV/g

Taajuusalue: 0.2-8000 Hz

Mittausalue: ± 30 g


Sovellukset: Condition Monitoring

Saatavissa 4 eri kokoonpanolla:

- 2 pin liittimellä AC213 - 1D
- Integroidulla kaapelilla AC213 - 2D
- Integroidulla suojatulla kaapelilla AC213 - 3D
- Integroidulla heavy duty suojatulla kaapelilla AC213 - 6D


AC213-1D

2 Pin Connector

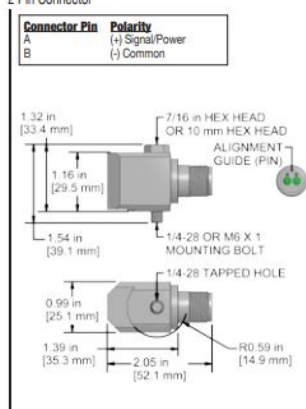


AC213-2D

Integral Cable

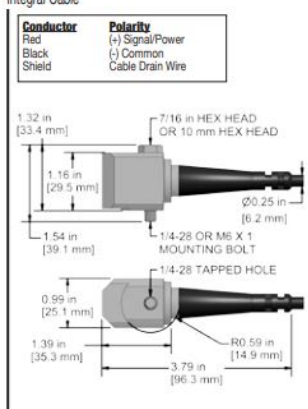


AC213-3D

Armored Integral Cable

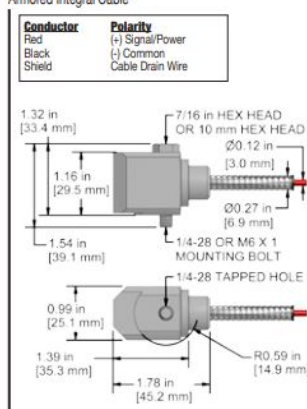

AC213-6D

Heavy Duty Armored Integral Cable

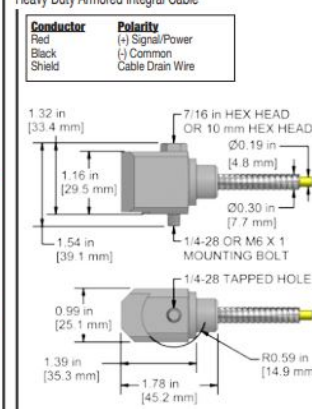

MSP_VIRTUEMART_TECHDETAILS

- Sensitivity: 250 mV/g
- Frequency Response (± 3 dB): 0.2-8000 Hz



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ

- Dynamic Range: ± 30 g, peak
- Power Requirements Voltage Source: 18-30 VDC
- Temperature Range: -58 to 250°F
(-50 to 121°C)
- Case Material: 316L Stainless Steel
- Connector: 2 Pin MIL-C-5015
- Max Temp: 250°F
(121°C)

MSP_VIRTUEMART_PRODDOCS

1. [Esite](http://www.mip.fi/images/docs/fi/1_vs_ac213_ds.pdf) , (URL: http://www.mip.fi/images/docs/fi/1_vs_ac213_ds.pdf)

MSP_VIRTUEMART_PRODUCT_IMAGE_TITLE



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd-/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ