

AC944 - CLASS 1 DIVISION 2/ZONE 2 SMALL ACCELEROMETER, 100 MV/G, SIDE EXIT 2 PIN MINI-MIL CONNECTOR

AC944 - Luokka 1, Atex Division 2/Zone 2, luokka I pienikokoinen kiihtyvyyssanturi, 100mV/g, liitin/kaapeli sivulla, 2 Pin Mini-Mil liitin

MSP_VIRTUEMA CTC
RT_MANUFACTURER

MSP_VIRTUEMA AC944
RT_SKU:

Tyyppi: 1-akselinen
Teollisuus
Sovellukset: Atex Zone 2

Herkkyys: 100 mV/g

Taajuusalue: 0.6-10000 Hz

Mittausalue: ± 50 g

Sovellukset: Condition Monitoring

Saatavissa 3 eri kokoonpanolla:

- 2 pin liittimellä AC944 - 1D
- Integroidulla kaapelilla AC944 - 2D
- Integroidulla suojatulla kaapelilla AC944 - 3D




www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ

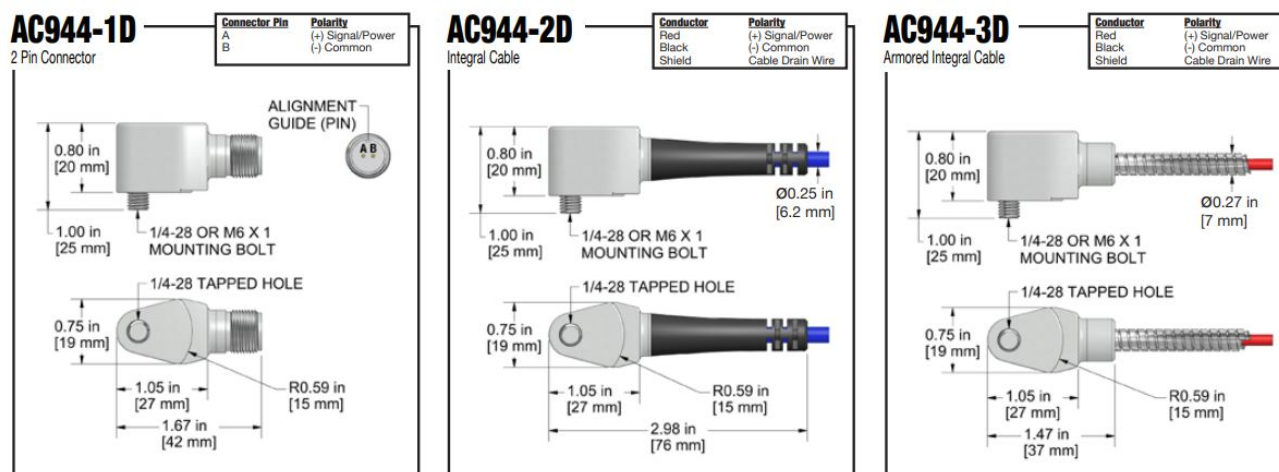

MSP_VIRTUEMART_TECHDETAILS

- Sensitivity: 100 mV/g
- Frequency Response (± 3 dB): 0.6-10000 Hz
- Dynamic Range: ± 50 g, peak
- Power Requirements Voltage Source: 18-28 VDC
- Temperature Range: -58 to 250°F
- Case Material: 316L Stainless Steel
- Connector: 2 Pin mini-MIL
- Max Temp: 125°C

MSP_VIRTUEMART_PRODDOCS

1. [Esite](http://www.mip.fi/images/docs/fi/1_vs_ac944_ds.pdf), (URL: http://www.mip.fi/images/docs/fi/1_vs_ac944_ds.pdf)

MSP_VIRTUEMART_PRODUCT_IMAGE_TITLE



www.facebook.com/mipelectronics



[www.linkedin.com/company/mip-electronics-ltd-/](http://www.linkedin.com/company/mip-electronics-ltd/)



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd-/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ