

AC961 - IEC CERTIFIED (IECEX), INTRINSICALLY SAFE ACCELEROMETER, TOP EXIT CONNECTOR / CABLE, 10 MV/G LOW CAPACITANCE

AC961 - IEC sertifioitu (IECEX) Intrinsically Safe, kiihtyvyyssanturi, 10 mV/g, liitin/kaapeli päällä, alhainen kapasitanssi

MSP_VIRTUEMA CTC
RT_MANUFACTURER

MSP_VIRTUEMA AC961
RT_SKU:

Tyyppi: 1-akselinen
Teollisuus
Sovellukset: Atex Zone 0

Herkkyys: 10 mV/g

Taajuusalue: 1.0-15000 Hz

Mittausalue: ± 500 g

Sovellukset: Condition Monitoring

Saatavissa 3 eri kokoonpanolla:

- 2 pin liittimellä AC961 - 1A
- Integroidulla suojatulla kaapelilla AC961 - 3C
- Integroidulla kaapelilla AC961 - 9C




www.facebook.com/mipelectronics



[www.linkedin.com/company/mip-electronics-ltd-/](https://www.linkedin.com/company/mip-electronics-ltd/)



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ

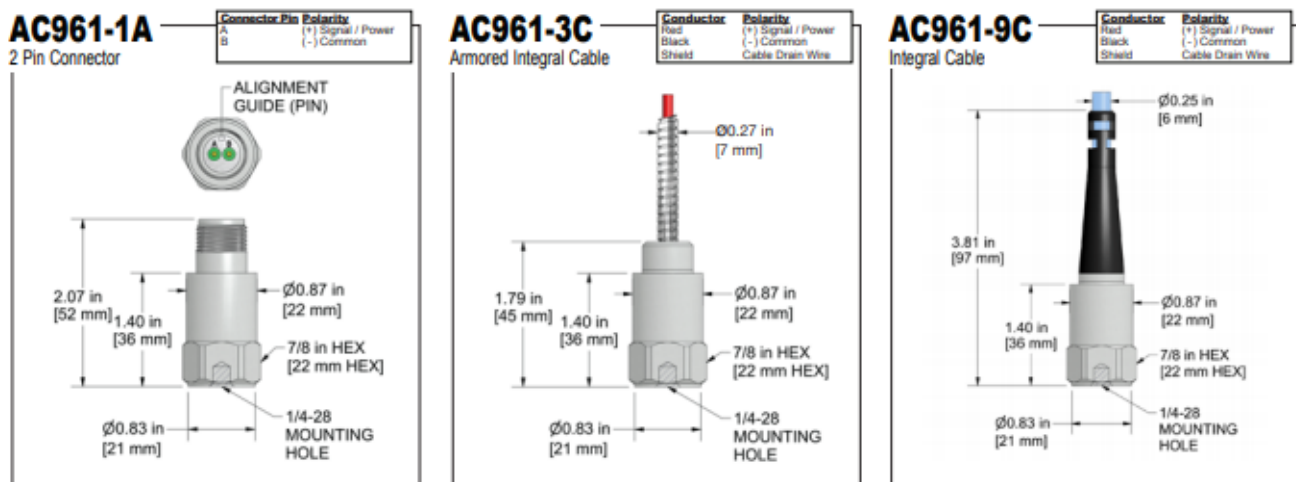

MSP_VIRTUEMART_TECHDETAILS

- Sensitivity: 10 mV/g
- Frequency Response (± 3 dB): 60-900,000 CPM (1.0-15000 Hz)
- Dynamic Range: ± 500 g, peak
- Power Requirements Voltage Source: 18-28 VDC
- Temperature Range: -40 to 250°F
- Case Material: 316L Stainless Steel
- Connector: 2 Pin MIL-C-5015
- Max Temp: 125°C

MSP_VIRTUEMART_PRODDOCS

1. [Esite](http://www.mip.fi/images/docs/fi/1_vs_ac961_ds.pdf) , (URL: http://www.mip.fi/images/docs/fi/1_vs_ac961_ds.pdf)

MSP_VIRTUEMART_PRODUCT_IMAGE_TITLE



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd-/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd-/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ