

AC963 - IEC CERTIFIED (IECEX), INTRINSICALLY SAFE ACCELEROMETER, TOP EXIT CONNECTOR / CABLE, 50 MV/G LOW CAPACITANCE

AC963 - IEC sertifioitu (IECEX) Intrinsically Safe, kiihtyvyyssanturi, 50 mV/g, liitin/kaapeli päällä, alhainen kapasitanssi

MSP_VIRTUEMA	CTC
RT_MANUFACTURER	
MSP_VIRTUEMA	AC963
RT_SKU:	
Tyyppi:	1-akselinen Teollisuus Sovellukset: Atex Zone 0
Herkkyys:	50 mV/g
Taajuusalue:	0.8-15000 Hz
Mittausalue:	± 100 g
Sovellukset:	Condition Monitoring

Saatavissa 3 eri kokoonpanolla:

- 2 pin liittimellä AC963 - 1A
- Integroidulla suojatulla kaapelilla AC963 - 3C
- Integroidulla kaapelilla AC963 - 9C




www.facebook.com/mipelectronics



[www.linkedin.com/company/mip-electronics-ltd-/](https://www.linkedin.com/company/mip-electronics-ltd/)



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ

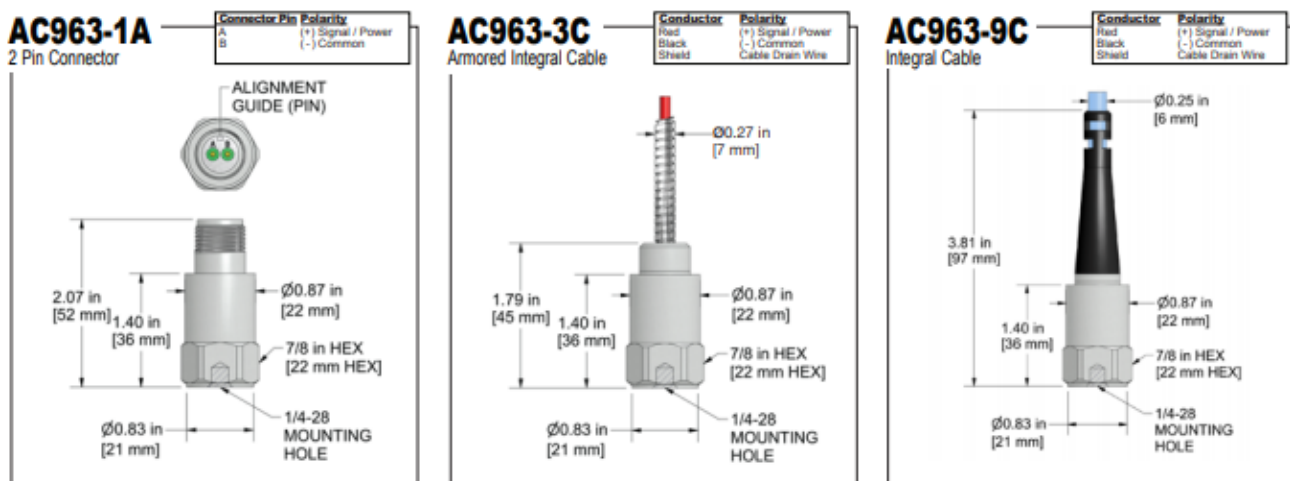

MSP_VIRTUEMART_TechDETAILS

- Sensitivity: 50 mV/g
- Frequency Response (± 3 dB): 48-900,000 CPM (0.8-15000 Hz)
- Dynamic Range: ± 100 g, peak
- Power Requirements Voltage Source: 18-28 VDC
- Temperature Range: -40 to 250°F
- Case Material: 316L Stainless Steel
- Connector: 2 Pin MIL-C-5015
- Max Temp: 125°C

MSP_VIRTUEMART_PRODDOCS

1. [Esite](http://www.mip.fi/images/docs/fi/1_vs_ac963_ds.pdf), (URL: http://www.mip.fi/images/docs/fi/1_vs_ac963_ds.pdf)

MSP_VIRTUEMART_PRODUCT_IMAGE_TITLE



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd-/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ