

AC965 - IEC CERTIFIED (IECEX), INTRINSICALLY SAFE ACCELEROMETER, TOP EXIT CONNECTOR / CABLE, 100 MV/G LOW CAPACITANCE

AC965 - IEC sertifioitu (IECEX) Intrinsically Safe, kiihtyvyyssanturi, 100 mV/g, liitin/kaapeli päällä, alhainen kapasitanssi

MSP_VIRTUEMA	CTC
RT_MANUFACTURER	
MSP_VIRTUEMA	AC965
RT_SKU:	
Tyyppi:	1-akselinen Teollisuus Sovellukset: Atex Zone 0
Herkkyys:	100 mV/g
Taajuusalue:	0.5-15000 Hz
Mittausalue:	± 80 g
Sovellukset:	Condition Monitoring

Saatavissa 4 eri kokoonpanolla:

- 2 pin liittimellä AC965 - 1A
- Integroidulla kaapelilla AC965 - 2C
- Integroidulla suojatulla kaapelilla AC965 - 3C
- Integroidulla kaapelilla AC965 - 9C




www.facebook.com/mipelectronics



[www.linkedin.com/company/mip-electronics-ltd-/](https://www.linkedin.com/company/mip-electronics-ltd/)



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ

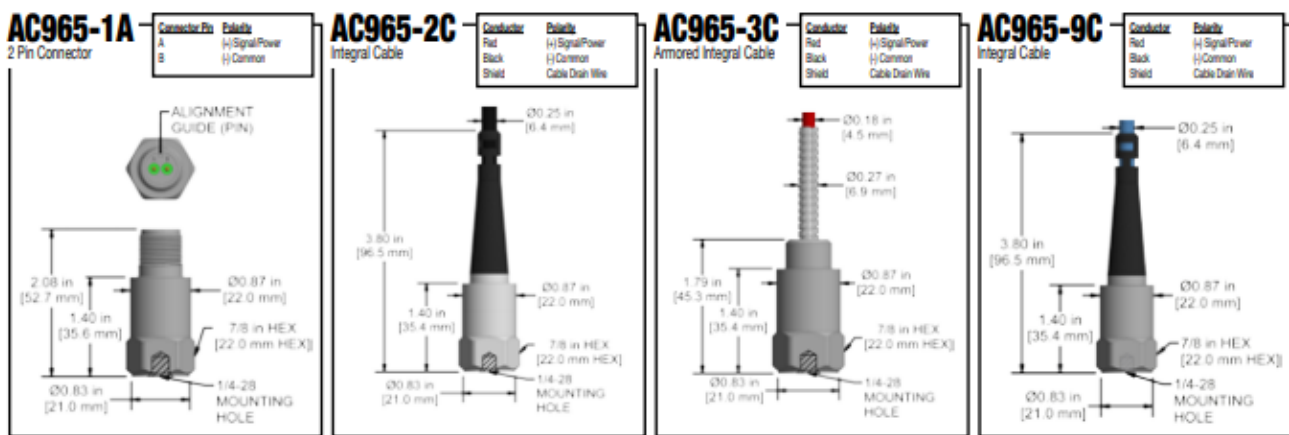

MSP_VIRTUEMART_TechDETAILS

- Sensitivity: 100 mV/g
- Frequency Response ($\pm 3\text{dB}$): 30-900,000 CPM (0.5-15000 Hz)
- Dynamic Range: ± 80 g, peak
- Power Requirements Voltage Source: 18-28 VDC
- Temperature Range: -40 to 250°F
- Case Material: 316L Stainless Steel
- Connector: 2 Pin MIL-C-5015
- Max Temp: 125°C

MSP_VIRTUEMART_PRODDOCS

1. [Esite](http://www.mip.fi/images/docs/fi/1_vs_ac965_ds.pdf), (URL: http://www.mip.fi/images/docs/fi/1_vs_ac965_ds.pdf)

MSP_VIRTUEMART_PRODUCT_IMAGE_TITLE



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd-/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ