

AC972 - INTRINSICALLY SAFE, MODAL/ODS, TRIAXIAL ACCELEROMETER, CONNECTOR/CABLE, 10 MV/G

AC972 - Intrinsically Safe kolmiakselinen kiihtyvyysanturi Modal/ODS sovelluksiin, 10 mV/g

MSP_VIRTUEMA CTC
RT_MANUFACTURER

MSP_VIRTUEMA AC972
RT_SKU:

Tyyppi: 3-akselinen
Teollisuus
Sovellukset: Atex Zone 0

Herkkyys: 10 mV/g

Taajuusalue: 1.0-10000 Hz

Mittausalue: ± 500 g

Sovellukset: Condition Monitoring
Modal and ODS analysis

Saatavissa 3 eri kokoonpanolla:

- 4 pin liittimellä AC972 - 1D
- Integroidulla suojatulla kaapelilla AC972 - 3D
- Integroidulla kaapelilla AC972 - 9D




www.facebook.com/mipelectronics



[www.linkedin.com/company/mip-electronics-ltd-/](https://www.linkedin.com/company/mip-electronics-ltd/)



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ

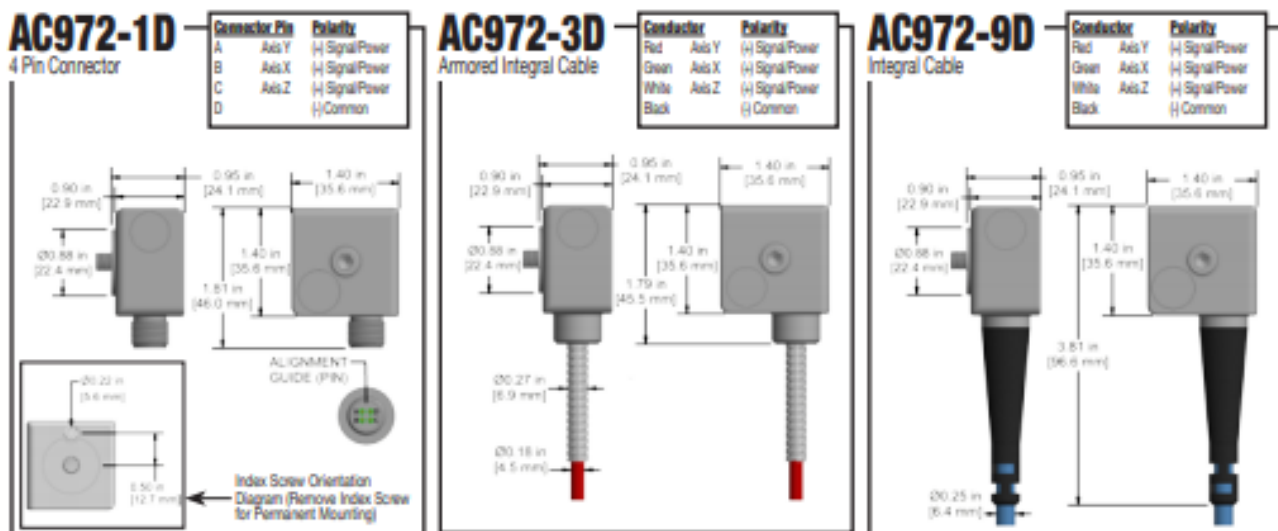

MSP_VIRTUEMART_TechDETAILS

- Sensitivity: 10 mV/g
- Frequency Response ($\pm 3\text{dB}$): 60-600,000 CPM (1.0-10000 Hz)
- Dynamic Range: ± 500 g, peak
- Power Requirements Voltage Source: 18-28 VDC
- Temperature Range: -65 to 250°F (-54 to 121°C)
- Case Material: 316L Stainless Steel
- Connector: 4 Pin J Connector
- Max Temp: 121°C

MSP_VIRTUEMART_PRODDOCS

1. [Esite](http://www.mip.fi/images/docs/fi/1_vs_ac972_ds.pdf), (URL: http://www.mip.fi/images/docs/fi/1_vs_ac972_ds.pdf)

MSP_VIRTUEMART_PRODUCT_IMAGE_TITLE



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ