

AC980 - INTRINSICALLY SAFE TRIAXIAL ACCELEROMETER, 100 MV/G, 4 PIN MINI-MIL SIDE EXIT CONNECTOR

AC980 - Intrinsically Safe kolmiakselinen kiihtyvyyssanturi, 100 mV/g, 4 Pin Mini-MIL liitäntä sivulla

MSP_VIRTUEMA CTC
RT_MANUFACTURER

MSP_VIRTUEMA AC980
RT_SKU:

Tyyppi: 3-akselinen
Teollisuus
Sovellukset: Atex Zone 0

Herkkyys: 100 mV/g




Taajuusalue: 0.6-10000 Hz

Mittausalue: ± 50 g

Sovellukset: Condition Monitoring

Saatavissa 3 eri kokoonpanolla:

- 4 pin liittimellä AC980 - 1D
- Integroidulla kaapelilla AC980 - 3D
- Integroidulla suojatulla kaapelilla AC980 - 9D

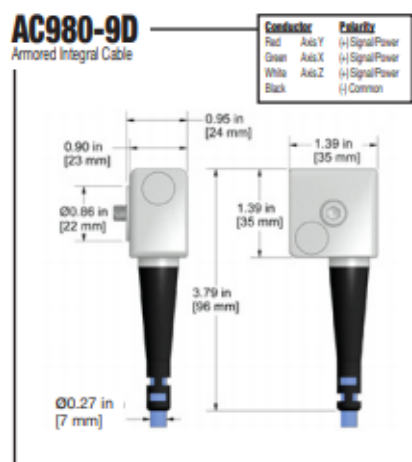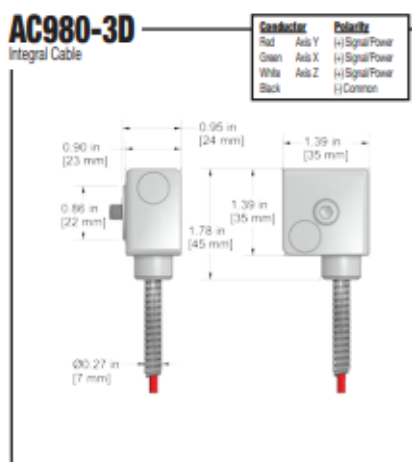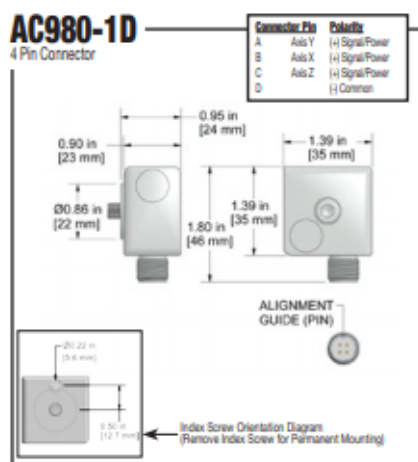

www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ

MSP_VIRTUEMART_TECHDETAILS

- Sensitivity: 100 mV/g
- Frequency Response ($\pm 3\text{dB}$): 36-600,000 CPM (0.6-10000 Hz)
- Dynamic Range: ± 50 g, peak
- Power Requirements Voltage Source: 18-28 VDC
- Temperature Range: -40 to 250°F
- Case Material: 316L Stainless Steel
- Connector: 4 Pin J Connector
- Max Temp: 121°C

MSP_VIRTUEMART_PRODDOCS

1. [Esite](http://www.mip.fi/images/docs/fi/1_vs_ac980_ds.pdf) , (URL: http://www.mip.fi/images/docs/fi/1_vs_ac980_ds.pdf)

MSP_VIRTUEMART_PRODUCT_IMAGE_TITLE



www.facebook.com/mipelectronics



[www.linkedin.com/company/mip-electronics-ltd-/](https://www.linkedin.com/company/mip-electronics-ltd/)



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ