

MCB211 - KEVYT, VALETTU RUNKO, PAINO VAIN 10G, 10 MV/G TOP EXIT, INTEGRAL CABLE, 10-32 MOUNTING, PREMIUM

MCB211 Overmolded Accelerometer, IP68 Rated, High Frequency, 30 kHz Response

MSP_VIRTUEMA CTC
RT_MANUFACTURER

MSP_VIRTUEMA MCB211
RT_SKU:

Tyyppi: 1-akselinen
Teollisuus

Herkkyys: 10 mV/g

Taajuusalue: 0
5-30000 Hz

Mittausalue: ± 50 g

- Sensitivity: 10 mV/g
- Frequency Response (± 3 dB): 30-1,800,000 CPM
- Dynamic Range: ± 500 g, peak
- Power Requirements Voltage Source: 18-30 VDC
- Temperature Range: -58 to 250°F
- Case Material: 316L Stainless Steel
- Connector: 10-32
- Max Temp: 250°F (121°C)

MSP_VIRTUEMART_TECHDETAILS



www.facebook.com/mipelectronics




www.linkedin.com/company/mip-electronics-ltd-/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ

Specifications	Standard	Metric	Specifications	Standard	Metric
Part Number	MCB211	M/MCB211	Environmental		
Sensitivity ($\pm 10\%$)		10 mV/g	Temperature Range	-59 to 250°F	-50 to 121°C
Frequency Response ($\pm 3\text{dB}$)	30-1,800,000 CPM	0.5 Hz-30 kHz	Maximum Shock Protection		10,000 g, peak
Frequency Response ($\pm 10\%$)	60-900,000 CPM	1 Hz-15 kHz	Electromagnetic Sensitivity		CE Pending
Frequency Response ($\pm 5\%$)	120-600,000 CPM	2 Hz-10 kHz	Sealing		Welded, Hermetic
Dynamic Range		± 500 g, peak	Physical		
Electrical			Sensing Element		PZT Ceramic
Settling Time		< 2 Seconds	Sensing Structure		Shear Mode
Voltage Source (IEPE)		18-30 VDC	Weight	0.35 oz	10 grams
Constant Current Excitation		2-10 mA	Case Material		316L Stainless Steel
Spectral Noise @ 10 Hz		100 $\mu\text{g}/\sqrt{\text{Hz}}$	Mounting		10-32 UNF
Spectral Noise @ 100 Hz		19 $\mu\text{g}/\sqrt{\text{Hz}}$	Connector		10-32
Spectral Noise @ 1000 Hz		5 $\mu\text{g}/\sqrt{\text{Hz}}$	Cable Jacket Diameter		0.14 in (3.6 mm)
Output Impedance		< 100 ohm	Cable Jacket Material		Polyurethane
Bias Output Voltage		10-14 VDC	Cable Conductor		26 AWG
Case Isolation		>10 ⁸ ohm			Twisted Shielded Pair
			Resonant Frequency	2,640,000 CPM	44 kHz
			Mounting Hardware	10-32 Stud	M5 Stud
			Calibration Certificate		CA10

Typical Frequency Response

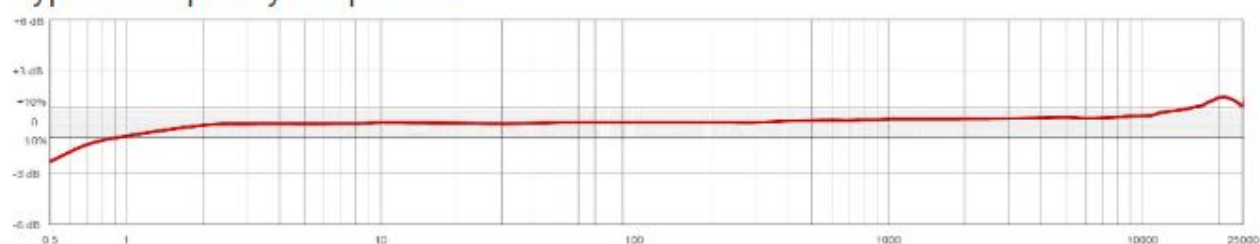

MSP_VIRTUEMART_PRODDOCS

1. [Esite](http://www.mip.fi/images/docs/fi/mcb211_datasheet.pdf) , (URL: http://www.mip.fi/images/docs/fi/mcb211_datasheet.pdf)

MSP_VIRTUEMART_PRODUCT_IMAGE_TITLE

www.facebook.com/mipelectronicswww.linkedin.com/company/mip-electronics-ltd/www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ