

TA178 - DUAL OUTPUT TEMPERATURE / ACCELERATION, M8 CAPTIVE BOLT, SIDE EXIT CONNECTOR / CABLE, 100 MV/G, 10 MV/K

TA178 - Dual Output, lämpötila ja kiihtyvyys, M8 kiinnityspultilla, liitin / kaapeli sivulla, 100 mV/g, 10 mV/K

MSP_VIRTUEMA CTC
RT_MANUFACTURER

MSP_VIRTUEMA TA178
RT_SKU:

Tyyppi: 1-akselinen
Teollisuus

Sovellukset: Condition Monitoring

Saatavissa 3 eri kokoonpanoa:

- 3 Pin Connector TA178-1A
- Integroidulla kaapelilla TA178-2C
- Integroidulla suojatulla kaapelilla TA178-3C




www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd-/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ

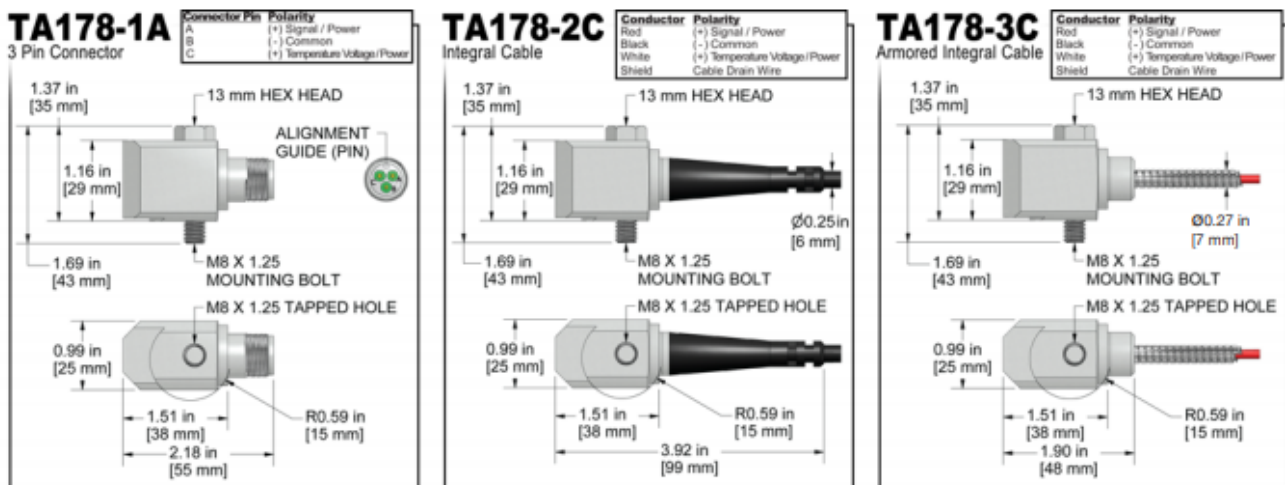

MSP_VIRTUEMART_TECHDETAILS

- Temperature **Measurement** Range: -40° to 212° F (-40° to 100° C)
- Temperature Output: 10 mV/K
- Frequency Response ($\pm 3\text{dB}$): 30-600,000 CPM (0,5-10000 Hz)
- Dynamic Range: ± 50 g, peak
- Sensitivity ($\pm 10\%$): 100 mV/g
- Case Material: 316L Stainless Steel
- Enviromental Temperature Range: -40 to 250°F

MSP_VIRTUEMART_PRODDOCS

1. [Esite](http://www.mip.fi/images/docs/fi/1_vs_ta178_ds.pdf) , (URL: http://www.mip.fi/images/docs/fi/1_vs_ta178_ds.pdf)

MSP_VIRTUEMART_PRODUCT_IMAGE_TITLE



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd-/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd-/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ