

TA184 - DUAL OUTPUT TEMPERATURE / ACCELERATION, M8 CAPTIVE BOLT, SIDE EXIT CONNECTOR / CABLE, 100 MV/G, 10 MV/°C

TA184 - Dual Output, lämpötila ja kiihtyvyys, M8 kiinnityspultilla, liitin / kaapeli sivulla, 100 mV/g, 10 mV/°C

MSP_VIRTUEMA CTC
RT_MANUFACT
URER

MSP_VIRTUEMA TA184
RT_SKU:

Tyyppi: 1-akselinen
Teollisuus

Sovellukset: Condition Monitoring

Saatavissa 3 eri kokoonpanoa:

- 3 Pin Connector TA184-1A
- Integroidulla kaapelilla TA184-2C
- Integroidulla suojatulla kaapelilla TA184-3C




www.facebook.com/mipelectronics



[www.linkedin.com/company/mip-electronics-ltd-/](https://www.linkedin.com/company/mip-electronics-ltd/)



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ

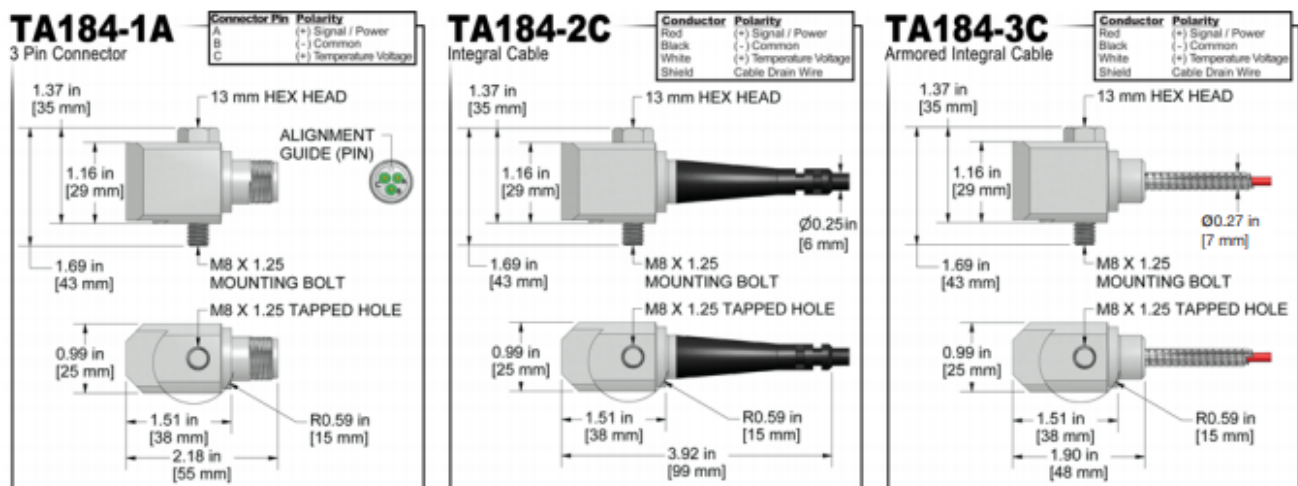

MSP_VIRTUEMART_TECHDETAILS

- Temperature **Measurement** Range: 37° to 250° F (3° to 121°C)
- Temperature Output: 10 mV/°C
- Frequency Response (±3dB): 30-900,000 CPM (0,5-15000 Hz)
- Dynamic Range: ± 50 g, peak
- Sensitivity (±10%): 100 mV/g
- Case Material: 316L Stainless Steel
- Enviromental Temperature Range: -40 to 250°F

MSP_VIRTUEMART_PRODDOCS

1. [Esite](http://www.mip.fi/images/docs/fi/1_vs_ta184_ds.pdf) , (URL: http://www.mip.fi/images/docs/fi/1_vs_ta184_ds.pdf)

MSP_VIRTUEMART_PRODUCT_IMAGE_TITLE



www.facebook.com/mipelectronics



[www.linkedin.com/company/mip-electronics-ltd-/](https://www.linkedin.com/company/mip-electronics-ltd/)



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd-/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ