

TA314 - DUAL OUTPUT, TEMPERATURE/ACCELERATION, SIDE EXIT M12 CONNECTOR, LOW POWER, 25 MV/G, 10 MV/°C

TA314 - Dual Output , lämpötila ja kiihtyvyys, M12 liitin sivulla, matalajännite, 25 mV/g, 10 mV/°C

MSP_VIRTUEMA CTC
RT_MANUFACT
URER

MSP_VIRTUEMA TA314
RT_SKU:

Tyyppi: 1-akselinen
Teollisuus

Sovellukset: Condition Monitoring

Saatavissa yhdellä kokoonpanolla:

- 4 Pin Connector TA314-M12A




www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd-/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ

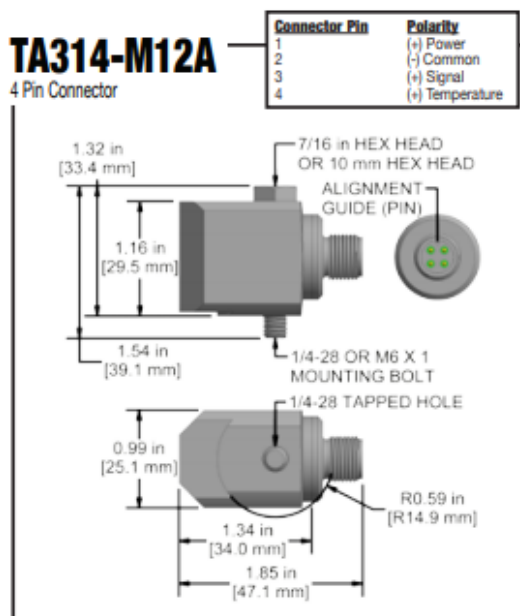

MSP_VIRTUEMART_TECHDETAILS

- Temperature **Measurement** Range: -40° to 250° F (-40° to 121°C)
- Temperature Output: 10 mV/°C
- Frequency Response (± 3 dB): 30-600,000 CPM (0,5-10000 Hz)
- Dynamic Range: ± 50 g, peak
- Sensitivity ($\pm 10\%$): 25 mV/g
- Case Material: 316L Stainless Steel
- Enviromental Temperature Range: -58 to 250°F

MSP_VIRTUEMART_PRODDOCS

1. [Esite](http://www.mip.fi/images/docs/fi/1_vs_ta314-m12_ds.pdf) , (URL: http://www.mip.fi/images/docs/fi/1_vs_ta314-m12_ds.pdf)

MSP_VIRTUEMART_PRODUCT_IMAGE_TITLE



www.facebook.com/mipelectronics



[www.linkedin.com/company/mip-electronics-ltd-/](https://www.linkedin.com/company/mip-electronics-ltd/)



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ