

TA915 - INTRINSICALLY SAFE ACCELEROMETER DUAL OUTPUT, ACCELERATION AND TEMPERATURE, 100 MV/G, 10 MV/°C, 3 PIN TOP EXIT CONNECTOR

TA915 - Intrinsically Safe, Dual Output anturi, kiihtyvyys ja lämpötila, 100 mV/g, 10 mV/°C, 3 Pin liitin/kaapeli päällä

MSP_VIRTUEMA CTC
RT_MANUFACT
URER

MSP_VIRTUEMA TA915
RT_SKU:

Tyyppi: 1-akselinen
Teollisuus
Sovellukset: Atex Zone 0

Herkkyys: 100 mV/g

Taajuusalue: 0.5-15000 Hz

Mittausalue: ± 80 g

Sovellukset: Condition Monitoring

Saatavissa 3 eri kokoonpanolla:

- 3 pin liittimellä TA915 - 1A
- Integroidulla suojatulla kaapelilla TA915 - 3C
- Integroidulla kaapelilla TA915 - 9C




www.facebook.com/mipelectronics



[www.linkedin.com/company/mip-electronics-ltd-/](https://www.linkedin.com/company/mip-electronics-ltd/)



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ

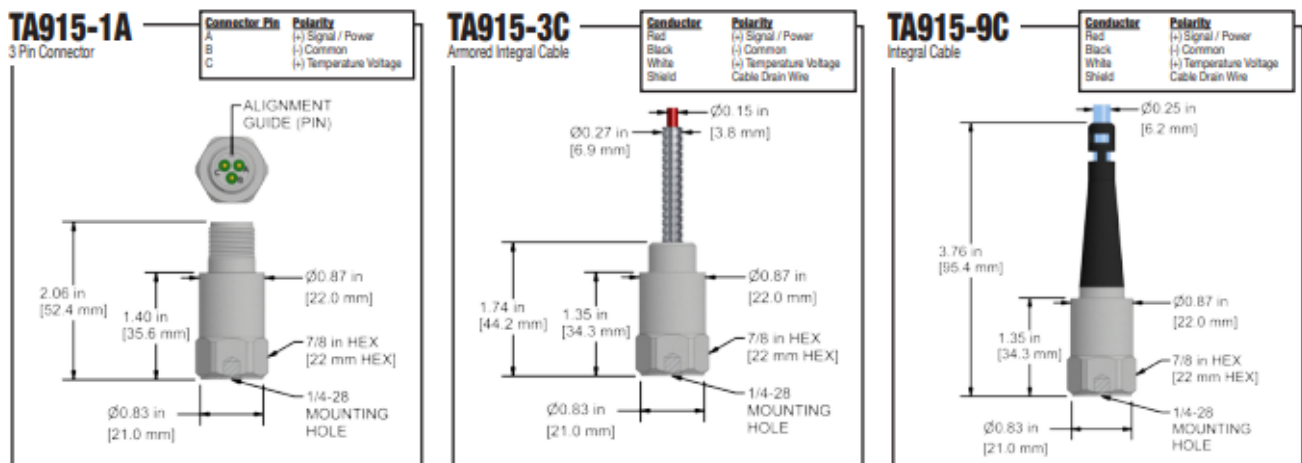

MSP_VIRTUEMART_TECHDETAILS

- Sensitivity: 100 mV/g
- Frequency Response (± 3 dB): 30-900,000 CPM (0.5-15000 Hz)
- Dynamic Range: ± 80 g, peak
- Temperature Measurement Range: 38 to 250° F (3 to 121° C)
- Temperature Output: 10 mV/°C
- Power Requirements Voltage Source: 18-28 VDC
- Temperature Range: -40 to 250°F (-40 to 121°C)
- Case Material: 316L Stainless Steel
- Connector: 3 Pin MIL-C-5015
- Max Temp: 250°F (121°C)

MSP_VIRTUEMART_PRODDOCS

1. [Esite](http://www.mip.fi/images/docs/fi/1_vs_ta915_ds.pdf), (URL: http://www.mip.fi/images/docs/fi/1_vs_ta915_ds.pdf)

MSP_VIRTUEMART_PRODUCT_IMAGE_TITLE



www.facebook.com/mipelectronics



[www.linkedin.com/company/mip-electronics-ltd-/](https://www.linkedin.com/company/mip-electronics-ltd/)



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd-/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ