

AC165 - 3 WIRE NEGATIVE VOLTAGE ACCELEROMETER, TOP EXIT


AC165 - 3 Wire Negative Voltage Accelerometer, top exit

Valmistaja:	CTC
Tuotenumero:	AC165
Tyyppi:	1-akselinen Teollisuus
Herkkyys:	100 mV/g
Taajuusalue:	7.5-15000 Hz
Mittausalue:	± 80 g
Sovellukset:	Kunnonvalvonta

Saatavilla 4 eri kokoonpanolla:

AC165-1A

3 Pin Connector

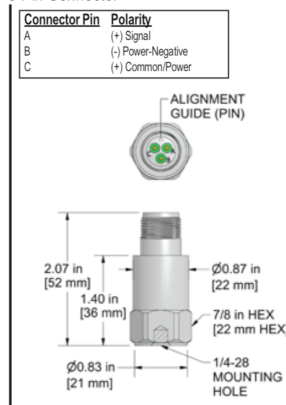


AC165-2C

Integral Cable




AC165-3C

Armored Integral Cable

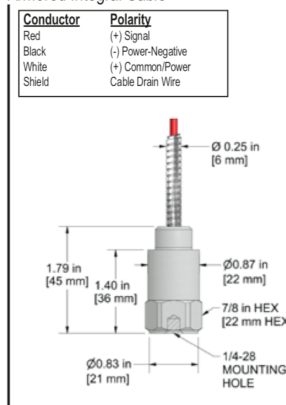

AC165

Wiring Diagram

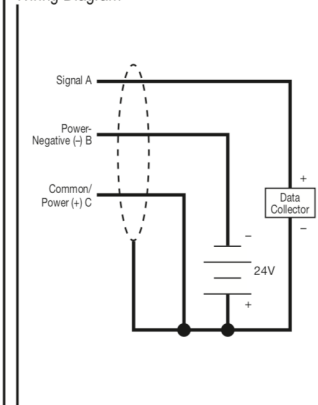

Tekniset tiedot

- Sensitivity: 100 mV/g
- Frequency Response (±3dB): 7.5-15000 Hz
- Dynamic Range: ± 80 g, peak
- Power Requirements Voltage Source: -20 to -28 VDC
- Temperature Range: -58 to 250°F (-50 to 121°C)
- Case Material: 316L Stainless Steel
- Connector: 3 Pin MIL-C-5015

- Max Temp: 250°F
(121°C)

Dokumentit

1. [Esite](http://www.mip.fi/images/docs/fi/1_vs_ac165_ds.pdf) , (URL: http://www.mip.fi/images/docs/fi/1_vs_ac165_ds.pdf)