

AC360 - MODAL/ODS TRIAXIAL ACCELEROMETER, CONNECTOR / CABLE, 100 MV/G

AC360 - Modal/ODS kolmiakselinen kiihtyvyyssanturi, liitin/kaapeli sivulla, 100 mV/g

Valmistaja:	CTC
Tuotenumero:	AC360
Tyyppi:	3-akselinen Teollisuus
Herkkyy:	100 mV/g
Taajuusalue:	0.6-10000 Hz
Mittausalue:	± 50 g
Sovellukset:	Kunnonvalvonta


Saatavissa 3 eri kokoonpanolla:

- 4 pin liittimellä AC360-1D
- integroidulla kaapelilla AC360-2D
- integroidulla metallikuorella suojatulla kaapelilla AC360-3D

AC360-1D

4 Pin Connector

Connector Pin	Polarity	Azima DU Compatible	Connector Pin	Polarity
A	Axis Y (+) Signal/Power	A	Axis 3 (+) Signal/Power	
B	Axis X (+) Signal/Power	B	Axis 2 (+) Signal/Power	
C	Axis Z (+) Signal/Power	C	Axis 1 (+) Signal/Power	
D	(-) Common/Grid	D	(-) Common/Grid	

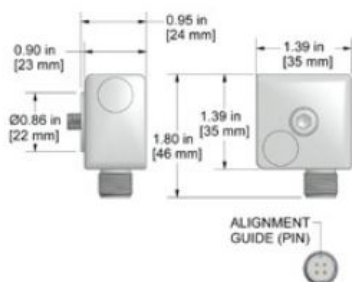

AC360-2D

Integral Cable


Conductor	Polarity	Azima DU Compatible	Conductor	Polarity
Red	Axis Y (+) Signal/Power	Red	Axis 3 (+) Signal/Power	
Green	Axis X (+) Signal/Power	Green	Axis 2 (+) Signal/Power	
White	Axis Z (+) Signal/Power	White	Axis 1 (+) Signal/Power	
Black	(-) Common/Grid	Black	(-) Common/Grid	



AC360-3D

Armored Integral Cable

Conductor	Polarity	Azima DU Compatible	Conductor	Polarity
Red	Axis Y (+) Signal/Power	Red	Axis 3 (+) Signal/Power	
Green	Axis X (+) Signal/Power	Green	Axis 2 (+) Signal/Power	
White	Axis Z (+) Signal/Power	White	Axis 1 (+) Signal/Power	
Black	(-) Common/Grid	Black	(-) Common/Grid	

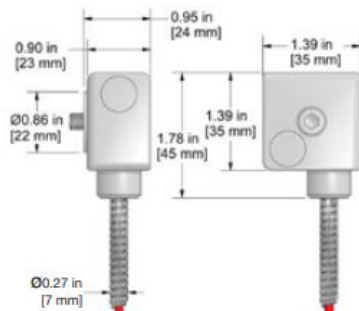

Tekniset tiedot

- Sensitivity: 100 mV/g
- Frequency Response (± 3 dB): 0,6-10000 Hz
- Dynamic Range: ± 50 g, peak
- Power Requirements Voltage Source: 18-30 VDC
- Temperature Range: -65 to 250°F
(-54 to 121°C)
- Case Material: 316L Stainless Steel
- Connector: 4 Pin J Connector
- Max Temp: 250°F (121°C)

Dokumentit

1. [Esite](http://www.mip.fi/images/docs/fi/1_vs_ac360_ds.pdf) , (URL: http://www.mip.fi/images/docs/fi/1_vs_ac360_ds.pdf)

Lisäkuvat ja videot

