


DX330180 Series

BENTLY™ 3300/3300XL COMPATIBLE 8 mm Driver Assembly



**Panel Mount Option
(Shown Above)**

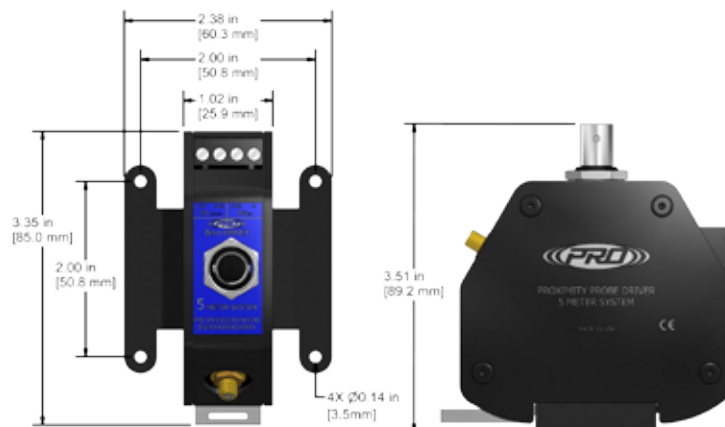

CE Certified

**Panel Mount Option
(Shown Above)**

Product Features

Driver assembly DX330180 offers multiple options for mounting and easy connections via BNC jack and screw terminals.

- Flexible system configuration
- DC gap and shaft vibration signals available via BNC jack and terminal block for analysis or monitoring
- Multiple mounting options (DIN rail, panel or none)

Specifications

Temperature Range: -31°F (-35°C) to 185°F (85°C)
 Linear Range: 10 to 90 mils (.25 - 2.30 mm) @ approximately -1 to -17 VDC
 Nominal Voltage Output: -200 mV/mil (-7.87 V/mm)
 Input Power/Voltage: -17.5 VDC to -30 VDC
 Aluminum enclosure
 Miniature 12-32 threaded connector
 4 position screw terminals + BNC Output
 Calibrated to AISI 4140 steel

TERMINAL BLOCK WIRING

Connections	Functions
V _t	-24 VDC
Com	+24 VDC
Com	+24 VDC
V _{out}	-200 mV/mil, DC Gap

Ordering Information

DX330180 - - **00**

System Length	Mounting Type	Regulatory Approval
5 = 5.0 meter 9 = 9.0 meter	0 = Panel (Mounting Screws Are Not Included) 1 = DIN 2 = None	00 = CE Certified



Example Part Number: DX330180-91-00
 4140 Steel, 9 meter system length, DIN mount, CE certified

Lifetime Warranty on Materials & Workmanship

www.ctconline.com



PROTECTION & RELIABILITY INSTRUMENTS