

GRAS 246A0

1/2" CCP Pressure Standard SysCheck2™ Microphone Set



Freq range: 3.15 Hz to 20 kHz
Dyn range: 25 dB(A) to 150 dB
Sensitivity: 12 mV/Pa
Use: For acoustic testing—
SysCheck2-enabled measurement chains

GRAS 246A0 is a 1/2" CCP microphone set with SysCheck2™—for measuring sound pressure levels at audible frequencies. It is terminated with a BNC connector and is TEDS compatible.

Introduction

GRAS 246A0 with SysCheck2™ is a ½" high-precision microphone suitable for laboratory work and ideal for production line testing in coupler setups for test of hearing aids, earphones, headphones, and headsets.

GRAS 246A0 is a variant of 46A0 that contains SysCheck2 functionality that can be accessed with many data acquisition systems, but offers seamless plug-and-play operation with Audio Precision's APx data acquisition software.

SysCheck2 and TEDS

Verification with SysCheck2*

SysCheck2 is a GRAS patented technology for verifying measurement chain integrity. This verification tool performs remote health check on microphones, channel gain and cable integrity. The verifications are made on each SysCheck2-enabled microphone connected to a CCP power module with transducer electronic data sheet (TEDS) support and measurement software with one click.. SysCheck2-enabled microphones also provide on-demand environmental data (temperature, barometric pressure and humidity). SysCheck2 functionality is particularly convenient when the microphones are placed where physical verification is a risk (for example, if the microphones are hidden in complex mechanical structures, such as couplers or specialized test boxes on production lines), the locations are difficult or dangerous to reach, or if used in a distributed measurement where there are many microphones spread out over a large area.

SysCheck2 microphones are equipped with an ultra-low power microcontroller located in the microphone preamplifier. This microcontroller is able to produce a reference signal that SysCheck2 compares to a reference measurement to determine the measurement chain status. Changes in microphone

or cable capacitance, channel gain or the unexpected use of a filter will result in a measurement deviation and will be reflected in a change in the output from the measurement channel. Once detected, the problem can be examined and then rectified.

The microphone can be set to display visual cues to the health of the measurement chain and can be used for the easy identification of specific microphones. In the evaluation of measurement-chain health, SysCheck2 can detect microphone sensitivity or channel gain changes greater than 0.3 dB. Additionally, the microphone acquires data on local environmental conditions, including temperature, pressure and humidity. This data can help with the tracability of acquired data and help refine testing to reduce the number of erroneous pass-fail results on a production line.

Full SysCheck2 functionality is ready for use out of the box when connected to [APx 500 Measurement Software](#) with GRAS [12BA](#), [12BB](#) or [12BE](#) (coming soon) power modules and an [Audio Precision APx series analyzer](#) or with an [Audio Precision APx series analyzer](#) with CCP and TEDS read/write capability.

However, all features are accessible with a suitable CCP-based power module, analyzer and data acquisition system after setup with the GRAS-supplied software development kit (SDK) or application programming interface (API), depending on your system.

For example, Siemens Simcenter Testlab Signature Acquisition (as of release 2021.1) has integrated SysCheck2 for use with GRAS 246AE microphones with a dedicated remote check procedure, allowing it to smoothly check the validity of a calibration previously performed in the field. After initial calibration of the system, their system enables a remote check to be performed in a dedicated tab. All

246AE SysCheck2 microphones present in the field can be checked with one click, and each microphone's measured value is stored in that microphone's TEDS as a reference value.

System verification with TEDS

TEDS is very useful to determine which microphone is connected to which input channel and contains relevant information needed by SysCheck2 and other tools used for measurement setup and verification. However, it is not by itself a check of whether the microphone is within specifications or not.

Design

GRAS 246A0 is a high-performance standard microphone set. The set is assembled and sealed with a label in our clean-room environment.

Microphone

The microphone cartridge is the high-quality IEC 61094 WS2P standardized [GRAS 40A0](#) 1/2" Prepolarized Pressure Microphone, designed for long-term reliability in multiple environments.

Preamplifier

The preamplifier is based on the [GRAS 26CA](#) 1/2" CCP Standard Preamplifier. This preamplifier unites SysCheck2 functionality with our well-known circuit-board substrates. In the industry, these circuit-board substrates are famous for their low self-noise, wide frequency range and excellent slew rate performance.

Compatibility

To perform as specified the GRAS 246A0 microphone set requires a constant current input module that can deliver 4 mA and 24 V unloaded CCP voltage supply. If the constant current supply is lower, the capability of driving long cables is reduced and consequently the upper frequency is reduced. If the voltage supply is lower it will

influence the upper dynamic range.

The microphone set is terminated with a BNC connector. Ready to use coax cable assemblies of various types and lengths are available in standard as well as customized lengths.

The 246A0 is IEEE 1451.4 TEDS v. 1.0 compliant. If your measurement platform is TEDS compatible, you will be able to read and write data such as properties and calibration data.

Service

Should you by mistake damage the diaphragm on a GRAS microphone we will in most cases be able to exchange it at a very reasonable cost and short turn-around time. This not only protects your investment but also meets your quality assurance department since you do not have to worry about new serial numbers etc.

Calibration

When leaving the factory, all GRAS microphones have been calibrated in a controlled laboratory environment using traceable calibration equipment. Depending on the use, measurement environment and internal quality control programs we recommend that the microphone is recalibrated at least once a year.

We offer two kinds of calibration as an optional after-sales service: GRAS Traceable Calibration and GRAS Accredited Calibration.

GRAS Traceable Calibration is a traceable calibration performed by trained personnel under controlled conditions according to established procedures and standards. This is identical to the rigorous calibration that all GRAS microphones are subjected to as an integral part of our quality assurance.

GRAS Accredited Calibration is performed by the

GRAS Accredited Calibration Laboratory that has been accredited in accordance with ISO 17025 by DANAK, the Danish Accreditation Fund.

If you want a new microphone set delivered with an accredited calibration instead of the default factory calibration, specify this when ordering.

For subsequent, needed acoustic verification and checks of your measurement setup, we recommend using a sound source like the [GRAS 42AG](#) Sound Calibrator. For sensitivity calibration we recommend using a reference sound source like the [GRAS 42AP](#) Intelligent Pistonphone.

Learn more at [calibration](#).

Quality and warranty

GRAS microphone sets are made of components from our proven standard portfolio and are all manufactured of high-quality material and branded parts that were chosen and processed to ensure life-long stability and robustness.

All parts are manufactured and assembled at the factory in Denmark by skilled and dedicated operators in a verified clean-room environment. The microphone diaphragm, body and unique protection grid are made of high-grade stainless steel and make the microphone set resistant to physical damage as well as corrosion caused by aggressive air or gasses.

This, together with the enforced gold-plated microphone terminal guarantees a highly reliable connection. Thanks to the high quality, our warranty against defective materials and workmanship is five years.

*** NOTE:** SysCheck2 is a verification tool, not a calibration tool. SysCheck2 cannot be used to correct microphone sensitivity. While SysCheck2 has the ability to detect small variations in the complete

measurement chain from the acquisition hardware to the microphone diaphragm, it cannot detect unexpected physical changes in the vicinity of the microphone (like a forgotten calibrator covering the microphone cartridge). SysCheck2 cannot detect errors due to unlikely scenarios with errors coming from multiple sources that add up and cancel each other out. [Jump back to footnote * in the text.](#)

Polarization/Connection		0 V / CCP
Frequency range (±1 dB)	Hz	5 to 12.5 k
Frequency range (±2 dB)	Hz	3.15 to 20 k
Dynamic range lower limit with GRAS preamplifier	dB(A)	25
Dynamic range upper limit with GRAS CCP preamplifier	dB	150
Set sensitivity @ 250 Hz (±3 dB)	mV/Pa	12
Set sensitivity @ 250 Hz (±3 dB)	dB re 1V/Pa	-38.5
Output impedance	Ω	<50
Output Voltage Swing, min. @ 24-28 V CCP voltage supply	Vp	8
Power supply min. to max.	mA	2 to 20*
DC bias voltage, typ.	V	13
Microphone venting		Rear
IEC 61094-4 Designation		WS2P
Temperature range, operation	°C / °F	-30 to 85 / -22 to 185 [†]
Temperature range, storage	°C / °F	-40 to 85 / -40 to 185
Temperature coefficient @250 Hz	dB/°C / dB/°F	-0.01 / -0.006
Static pressure coefficient @250 Hz	dB/kPa	-0.005
Humidity range non condensing	% RH	10 to 90
Humidity coefficient @250 Hz	dB/% RH	-0.1 (10-90%)
Influence of axial vibration @1 m/s ²	dB re 20 µPa	66
TEDS UDID (IEEE 1451.4)		I27-0-0-0U
Connector type		BNC
CE/RoHS compliant/WEEE registered		Yes/Yes/Yes
Weight	g / oz	30.15 / 1.064
SysCheck2 resolution**	dB	0.3

* At temperatures below -10°C / 14°F use at least 4 mA for full functionality of SysCheck2.

† If used at temperatures higher than 70°C / 158°F, use high-temperature cables.

‡ SysCheck2 functional temperature range is between -20°C / -4°F and 65°C / 149°F.

** Requires an ambient noise level less than 85 dB SPL.

GRAS HALT Test Parameters^{††}

Humidity 90%	@50°C / 122°F	48 hours
Drop horizontal orientation of microphone, attached to 2 kg load	m	1
Drop vertical, grid downwards	m	1
Vibration horizontal and vertical	@8 g	15 hours

†† For a short introduction to HALT, see the section "GRAS HALT" above.


Environmental sensor data accuracy (operational from -40 to 85°C / -40 to 185°F^{‡‡}

	Accuracy	Range for given Accuracy
Temperature	±2°C / 3.6°F	from 0 to 65°C / 32 to 149°F
Pressure, static	±1.5 hPa	from 0 to 65°C / 32 to 149°F and 300 to 1100 hPa
Relative humidity	±4%	from 0 to 65°C / 32 to 149°F


‡‡ This temperature range is solely for the functionality of the environmental data acquisition. This table provides the temperature ranges where the stated accuracy is guaranteed. For example, if the SysCheck2-stated temperature falls below the microphones operational temperature limit, it may not have the stated accuracy but should still be confirmed.

Temperature: 20°C / 64°F


Pressure: 760 mm

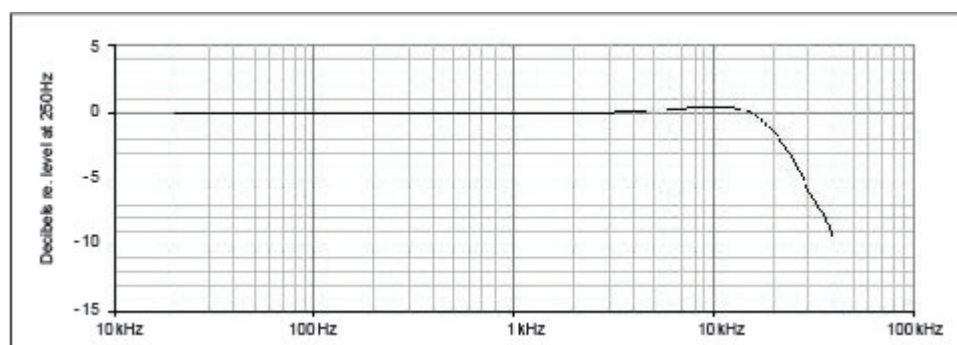

Typical frequency response.


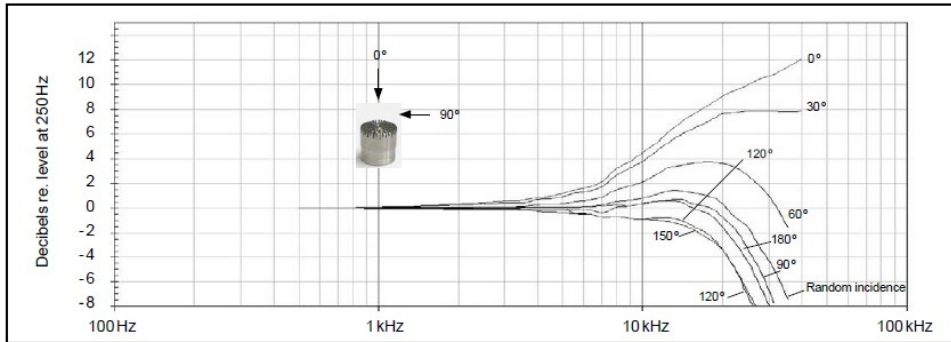


Free-field corrections for different angles of incidence

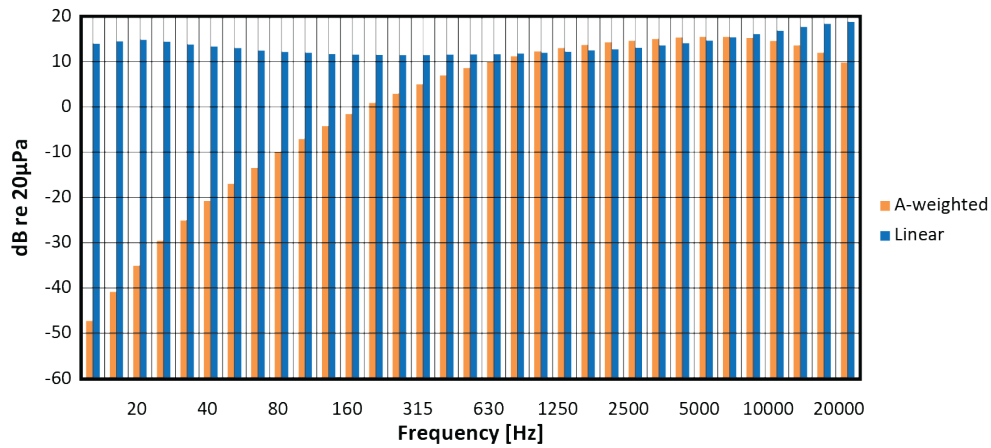

Typical noise floor in dB shown in 1/3-octave bands—linear and A-weighted.

GRAS Sound & Vibration reserves the right to change specifications without notice.

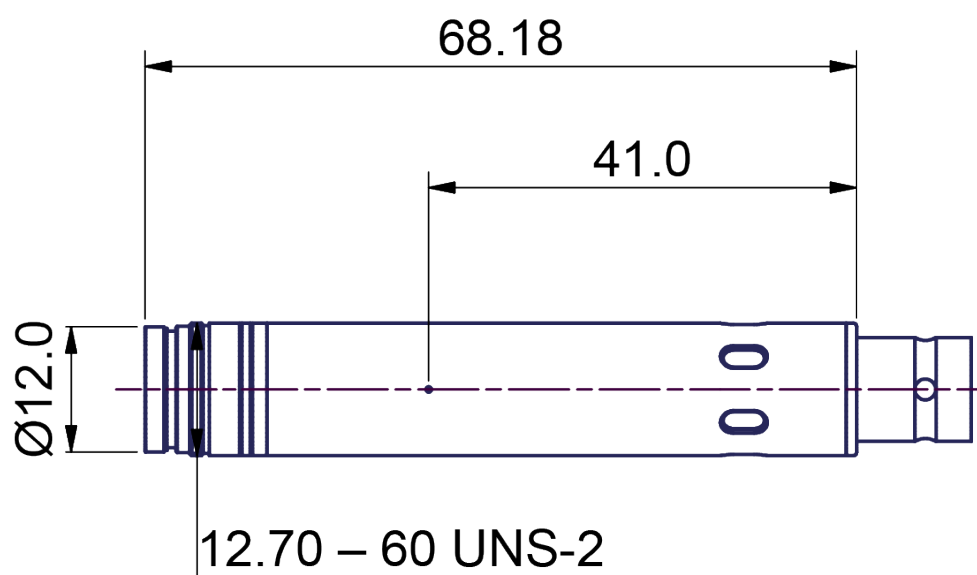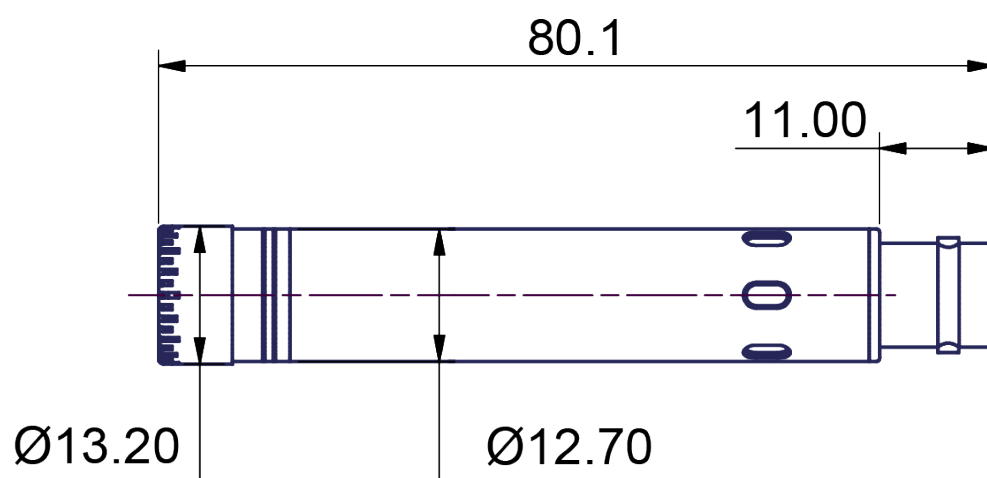

246A0	1/2" CCP Pressure Standard SysCheck2 Microphone Set
-------	---

Optional items

GRAS AA0035	3 m BNC - BNC Cable
GRAS AA0039-CL	Customized length BNC - BNC Cable
GRAS AL0008	½" Microphone Holder, POM
GRAS AL0012	½" Microphone Holder, Stainless Steel
GRAS AL0005	Swivel head
GRAS AL0006	Tripod
GRAS AM0069	Windscreen for ½" Microphones
GRAS RA0131	½" Rain protection cap
GRAS 12BA	1-Channel CCP Power Module with TEDS Support
GRAS 12BB	4-Channel CCP Power Module with TEDS Support
GRAS 42AG	Multifunction Sound Calibrator, Class 1
GRAS 42AP	Intelligent Pistonphone, Class 0
GRAS CA0029	Traceable Calibration of Microphone Set
GRAS CA2301	Accredited Calibration of Microphone Set

GRAS Sound & Vibration reserves the right to change accessories without notice.

GRAS Worldwide

Subsidiaries and distributors in more
than 40 countries

HEAD OFFICE, DENMARK GRAS SOUND & VIBRATION

Skovlytoften 33
2840 Holte
Denmark
Tel: +45 4566 4046
www.grasacoustics.com
gras@grasacoustics.com

USA GRAS SOUND & VIBRATION

5750 S.W. Arctic Drive
Beaverton, OR 97005
Tel: 503-627-0832
Toll Free: 800-231-7350
www.grasacoustics.com
sales-usa@grasacoustics.com

UK GRAS SOUND & VIBRATION

Unit 115, Gibson House,
Ermine Business Park, Huntingdon,
Cambridgeshire, PE29 6XU
Tel: +44 (0) 7762 584 202
www.grasacoustics.com
sales-uk@grasacoustics.com

CHINA GRAS SOUND & VIBRATION

Room 303, Building T6
Hongqiaohui, 990, Shenchang Road
Minhang District, Shanghai
China. 201106
Tel: +86 21 64203370
www.grasacoustics.cn
cnsales@grasacoustics.com



About GRAS Sound & Vibration

GRAS is a worldwide leader in the sound and vibration industry. We develop and manufacture state-of-the-art measurement microphones and related equipment for industries where acoustic measuring accuracy and repeatability are of the utmost importance. This includes applications and solutions for customers within the fields of aerospace, automotive, audiology, consumer electronics and other highly demanding industries. GRAS microphones are designed to live up to the high quality, durability and accuracy that our customers have come to expect, trust and require.

GRAS Sound & Vibration is represented through subsidiaries and distributors in more than 40 countries and is part of Axiometrix Solutions, a leading test solutions provider comprised of globally recognized measurement brands. Read more at www.grasacoustics.com

grasacoustics.com

GRAS Sound
& Vibration
An Axiometrix Solutions Brand