

AC134 - LOW FREQUENCY ACCELEROMETER, SIDE EXIT CONNECTOR, 500 MV/G

AC134 - Matala taajuus, kiihtyvyysanturi, liitiin sivulla, 500 mV/g

MSP_VIRTUEMA CTC
RT_MANUFACT
URER

MSP_VIRTUEMA AC134
RT_SKU:

Tyyppi: 1-akselinen
Teollisuus

Herkkyys: 500 mV/g

Taajuusalue: 0.1-8000 Hz

Mittausalue: ± 10 g

Sovellukset: Condition Monitoring

Saatavissa vain yhdellä kokoonpanolla:



www.facebook.com/mipelectronics



[www.linkedin.com/company/mip-electronics-ltd-/](https://www.linkedin.com/company/mip-electronics-ltd/)




www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ

AC134-1D

2 Pin Connector

Connector Pin	Polarity
A	(+) Signal/Power
B	(-) Common

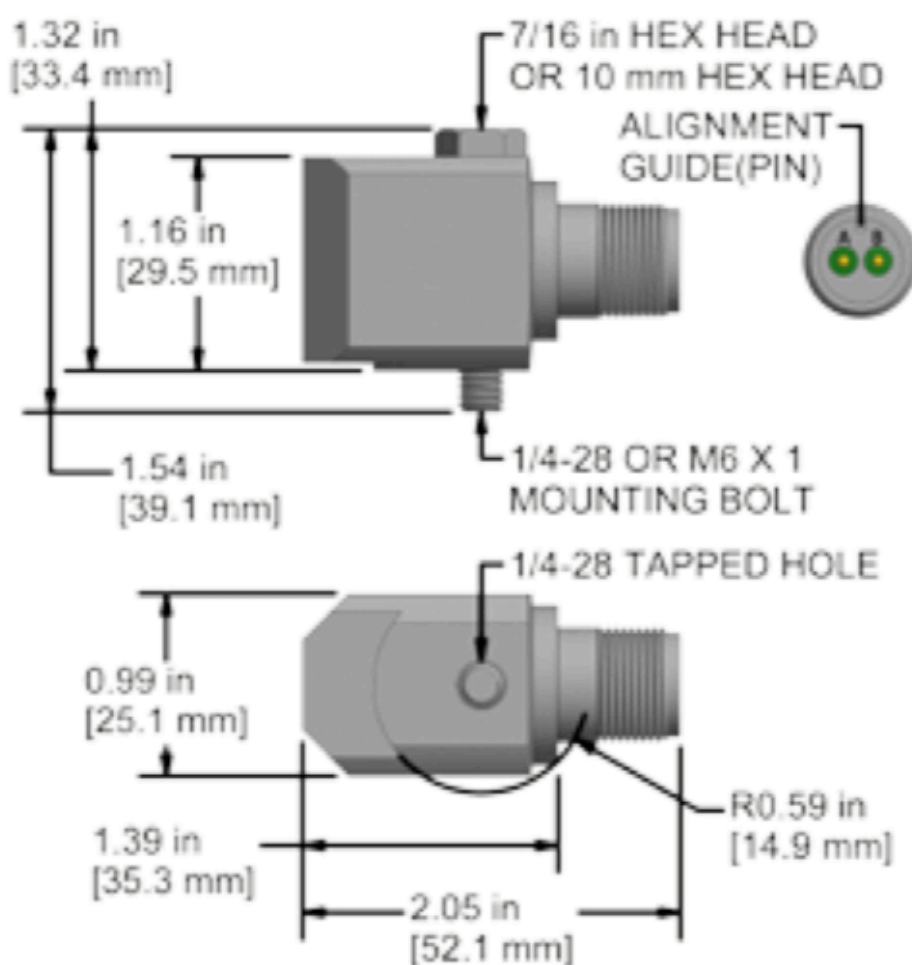

MSP_VIRTUEMART_TECHDETAILS

- Sensitivity: 500 mV/g
- Frequency Response (± 3 dB): 0.1-8000 Hz
- Dynamic Range: ± 10 g, peak



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ

- Power Requirements Voltage Source: 18-30 VDC
- Temperature Range: -58 to 250°F
(-50 to 121°C)
- Case Material: 316L Stainless Steel
- Connector: 2 Pin MIL -C- 5015
- Max Temp: 250°F
(121°C)

MSP_VIRTUEMART_PRODDOCS

1. [Esite](http://www.mip.fi/images/docs/fi/1_vs_ac134_ds.pdf) , (URL: http://www.mip.fi/images/docs/fi/1_vs_ac134_ds.pdf)

MSP_VIRTUEMART_PRODUCT_IMAGE_TITLE



www.facebook.com/mipelectronics



[www.linkedin.com/company/mip-electronics-ltd-/](https://www.linkedin.com/company/mip-electronics-ltd/)



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ



www.facebook.com/mipelectronics



www.linkedin.com/company/mip-electronics-ltd-/



www.youtube.com/channel/UCpKEF_7bS4dMC4qPokUAgDQ