

AC115 - LOW COST TRIAXIAL ACCELEROMETER, 100 MV/G

Edullinen 3-akselinen kiihtyvyyssanturi peruskäyttöön, 100mV/g






Käyttökohteet

Valmistaja:	CTC
Tuotenumero:	AC115
Sovellukset:	Kunnonvalvonta
Herkkyys:	100 mV/g
Taajuusalue:	1-6500 Hz
Tyyppi:	3-akselinen
Mittausalue:	± 50 g
Tyyppi:	Teollisuus

Saatavissa 3 eri kokoonpanolla:

- 4 pin liittimellä AC115 - 1D
- Integroidulla kaapelilla AC115 - 2D
- Integroidulla suojatulla kaapelilla AC115 - 3D

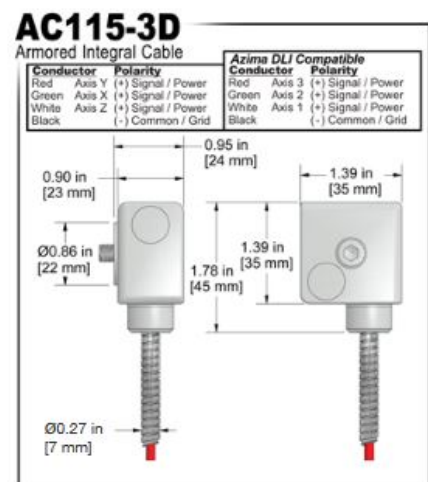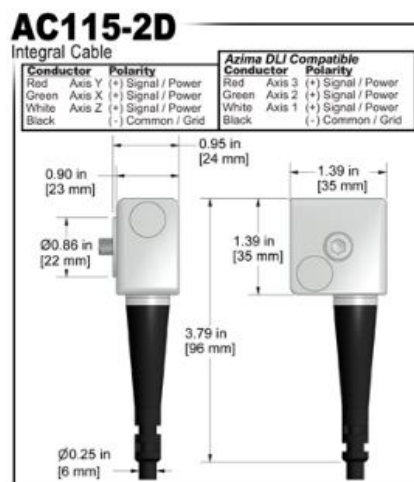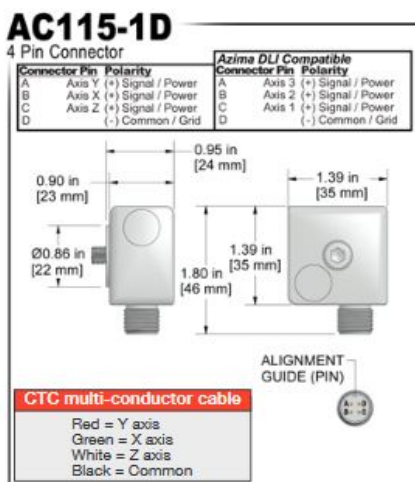


Tekniset tiedot

- Sensitivity: 100 mV/g
- Frequency Response ($\pm 3\text{dB}$): 1-6500 Hz
- Dynamic Range: ± 50 g, peak
- Power Requirements Voltage Source: 18-30 VDC
- Temperature Range: -58 to 250°F (-50 to 121°C)
- Case Material: 316L Stainless Steel
- Connector: 4 Pin J Connector
- Max Temp: 121°C

Dokumentit

1. [Esite](http://www.mip.fi/images/docs/fi/1_vs_ac115_ds.pdf), (URL: http://www.mip.fi/images/docs/fi/1_vs_ac115_ds.pdf)

Lisäkuvat ja videot

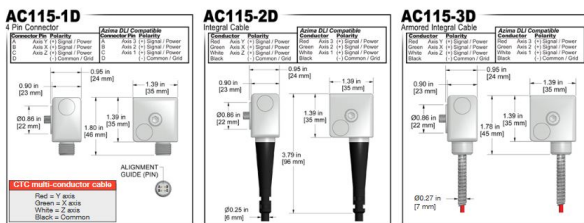

Product Features

Low Cost Triaxial Sensor
Speeds Data Collection

- **$\pm 15\%$ Sensitivity**
- **Monitor 3 Channels of Data Simultaneously**
- **Affordably Priced**